

10/05/00
Jc944 U.S. PTO

10-10-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Date: October 5, 2000

File No. A-69622/DCA/IWC

Box PATENT APPLICATION FEE

Assistant Commissioner for Patents
Washington, DC 20231

"EXPRESS MAIL" MAILING LABEL NUMBER EL 683 947 431 US
DATE OF DEPOSIT October 5, 2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO: BOX PATENT APPLICATION FEE, ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, DC 20231.

TYPED NAME Kari Bateman

SIGNED

Kari Bateman

Sir:

Transmitted herewith for filing is the patent application of Inventor(s): Burton A. HIPP

For: SNAPSHOT RESTORE OF APPLICATION CHAINS AND APPLICATIONS

Enclosed are also:

- ☐ Prior Art Statement.
☒ 15 Sheets of drawings, Formal ☐, Informal ☒
☒ An Assignment of the invention to: Ejasent Inc.
☒ Declaration and Power of Attorney for Patent Application.
☒ Verified Statement Claiming Small Entity Status-Small Business Concern

	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA	SMALL ENTITY RATE FEE	OTHER THAN SMALL ENTITY RATE FEE
BASIC FEE			\$355	\$710
TOTAL CLAIMS	6 - 20	-0-	x 9 = \$0	x 18 = \$
INDEP CLAIMS	4 - 3	-1-	x 40 = \$40	x 80 = \$
MULTIPLE DEPENDENT CLAIM PRESENTED			+130 = \$	+260 = \$
If the difference in Col 1 is less than zero, enter "0" in Col. 2			TOTAL \$395	TOTAL \$

- ☒ Our Check No. 6332 in the amount of \$435.00 is enclosed to cover both the filing fee of \$395.00 and the assignment recordation fee of \$40.00.
- ☒ This application claims priority to Provisional Application Serial Nos. 60/157,727 filed October 5, 1999, 60/157,728 filed October 5, 1999, 60/157,729 filed October 5, 1999, 60/157,833 filed October 5, 1999, and 60/157,834 filed October 5, 1999.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, including extension fees, or credit any overpayment to Deposit Account No. 06-1300 (Order No. A-69622/DCA). Two copies of this sheet are enclosed.

Respectfully submitted,

Steven M. Freeland
Steven M. Freeland, Reg. No. 42,555

FLEHR HOHBACH TEST ALBRITTON & HERBERT LLP
Four Embarcadero Center, Suite 3400
San Francisco, California 94111-4187
Telephone: (415) 781-1989
Fax: (415) 398-3249
1018271

(1.14) 08/95

Jc922 U.S. PTO
09/680847
10/05/00

Applicant or Patentee: Hipp
Serial No.: Not Assigned

Atty Docket No. A-69622/DCA/JWC
Filed Herewith

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN**

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN: Ejasent Inc.
ADDRESS OF SMALL BUSINESS CONCERN: 2490 Charleston Road
Mountain View, CA 94043

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled *Snapshot Restore of Application Chains and Applications* by inventor *Burton A. Hipp*, described in the specification filed herewith. If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e). *NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Name: _____
Address: _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name/Title: Rajeev Bharadhwaj, Founder & CTO
Address: 2490 Charleston Road, Mountain View, CA 94043

SIGNATURE

Rajeev Bharadhwaj

DATE 10/4/00

1018175

SNAPSHOT RESTORE OF APPLICATION CHAINS AND APPLICATIONS

Inventor: Burton Hipp

REFERENCE TO RELATED APPLICATIONS

The present application claims priority to and incorporates the following applications by reference: DYNAMIC SYMBOLIC LINK RESOLUTION, Prov. No. 60/157,728, filed on October 5, 1999; SNAPSHOT VIRTUAL TEMPLATING, Prov. No. 60/157,728, filed on October 5, 1999; SNAPSHOT RESTORE OF APPLICATION CHAINS AND APPLICATIONS, Prov. No. 60/157,833, filed on October 5, 1999; VIRTUAL RESOURCE-ID MAPPING, Prov. No. 60/157,727, filed on October 5, 1999; and VIRTUAL PORT MULTIPLEXING, Prov. No. 60/157,834, filed on October 5, 1999.

FIELD OF THE INVENTION

The present invention relates broadly to computer networks. Specifically, the present invention relates to adaptively scheduling applications on-demand onto computers in a computer network. More specifically, the present invention relates to making a snapshot image of a running application including data and state information, and restoring a running application from the snapshot image.

BACKGROUND

Global computer networks such as the Internet have allowed electronic commerce ("e-commerce") to flourish to a point where a large number of customers purchase goods and services over websites operated by online merchants. Because the Internet provides an effective medium to reach this large customer base, online merchants who are new to the e-commerce marketplace are often flooded with high customer traffic from the moment their websites are rolled out. In order to effectively serve customers, online merchants are charged with the same

responsibility as conventional merchants: they must provide quality service to customers in a timely manner. Often, insufficient computing resources are the cause of a processing bottleneck that results in customer frustration and loss of sales. This phenomena has resulted in the need for a new utility: leasable on-demand computing infrastructure. Previous attempts at providing computing resources have entailed leasing large blocks of storage and processing power. However, for a new online merchant having no baseline from which to judge customer traffic upon rollout, this approach is inefficient. Either too much computing resources are leased, depriving a start up merchant of financial resources that are needed elsewhere in the operation, or not enough resources are leased, and a bottleneck occurs.

To make an on-demand computer infrastructure possible, computer applications must be ported across computer networks to different processing locations. However, this approach is costly in terms of overhead for the applications to be moved across the network must be saved, shut down, stored, ported and then restored and re-initialized with the previously running data. The overhead is prohibitive and negates any performance improvements realized by transferring the application to another computer. Thus, there remains a heartfelt need for a system and method for effecting a transfer of applications across computer networks without incurring costly processing overhead.

SUMMARY OF THE INVENTION

The present invention solves the problems described above by saving all process state, memory, and dependencies related to a software application to a snapshot image. Interprocess communication (IPC) mechanisms such as shared memory and semaphores must be preserved in the snapshot image as well. IPC mechanisms include any resource that is shared between two process or any communication mechanism or channel that allow two processes to communicate or interoperate is a form of IPC. Sockets, shared memory, semaphores and pipes are some examples of IPC mechanisms. Between snapshots, memory deltas are flushed to the snapshot image, so that only the modified-pages need be updated. Software modules that track usage of resources and their corresponding handles are included as part of the snapshot/restore framework of the present invention. At snapshot time, state is saved by querying the operating system kernel, the application snapshot/restore framework components, and the process management

subsystem that allows applications to retrieve internal process-specific information not available through existing system calls. At restore time, the reverse sequence of steps for the snapshot procedure is followed and state is restored by making requests to the kernel, the application snapshot/restore framework, and the process management subsystem.

These and many other attendant advantages of the present invention will be understood upon reading the following detailed description in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a high level block diagram illustrating the various components of a computer network used in connection with the present invention;

FIG. 2 is a high level block diagram illustrating the various components of a computer used in connection with the present invention;

FIG. 3 illustrates how application state is tracked using library and operating system kernel interposition;

FIG. 4 illustrates the capture of an application's run-time state;

FIG. 5 is a flow chart illustrating the logical sequence of steps executed to create a snapshot image of an application instance;

FIG. 6 is a flow chart illustrating the logical sequence of steps executed to restore an application instance from a snapshot image.;

FIG. 7 is an illustration of the format of a snapshot virtual template;

FIG. 8 is a flowchart illustrating the logical sequence of steps executed to create a snapshot virtual template;

FIG. 9 is a flowchart illustrating the logical sequence of steps executed to clone a snapshot virtual template;

FIG. 10 illustrates the registration of an application using virtual resource identifiers;

FIG. 11 illustrates the allocation of a virtual resource;

FIG. 12 illustrates the translation of a virtual resource to a system resource;

FIG. 13 illustrates the translation of a system resource to a virtual resource;

FIG. 14 is a flowchart illustrating the logical sequence of steps executed to create a virtual translation table; and

FIG. 15 is a flowchart illustrating the logical sequence of steps executed to translate a virtual resource.

DETAILED DESCRIPTION

A. Snapshot Restore

FIG. 1 illustrates in high level block diagram form the overall structure of the present invention as used in connection with a global computer network 100 such as the Internet. Remote users 102-1 and 102-2 can connect through the computer network 100 to a private network of computers 106 protected by firewall 104. Computer network 106 is a network comprising computers 150-1, 150-2, through 150-n, where n is the total number of computers in network 106. Computers 150 are used to run various applications, as well as host web sites for access by remote users 102. The present invention is implemented on computer network 106 in the form of virtual environments 110-1 and 110-2. While only two virtual environments are illustrated, it is to be understood that any number of virtual environments may be utilized in connection with the present invention.

FIG. 2 illustrates in high level block diagram form a computer that may be utilized in connection with the present invention. Computer 150 incorporates a processor 152 utilizing a central processing unit (CPU) and supporting integrated circuitry. Memory 154 may include RAM and NVRAM such as flash memory, to facilitate storage of software modules executed by processor 152, such as application snapshot/restore framework 200. Also included in computer 150 are keyboard 158, pointing device 160, and monitor 162, which allow a user to interact with computer 150 during execution of software programs. Mass storage devices such as disk drive 164 and CD ROM 166 may also be in computer 150 to provide storage for computer programs and associated files. Computer 150 may communicate with other computers via modem 168 and telephone line 170 to allow the computer 150 to be operated remotely, or utilize files stored at different locations. Other media may also be used in place of modem 168 and telephone line 170, such as a direct connection or high speed data line. The components described above may be operatively connected by a communications bus 172.

FIG. 3 shows how application states are tracked via library and kernel interposition. The application snapshot/restore framework 200 is a software module that processes transactions

between the operating system 206 and the applications 208. Requests for system resources or changes to process state are routed internally and the application snapshot/restore framework 200 tracks these events in anticipation of a snapshot. The application snapshot/restore framework 200 is transparent to running (and snapshotted) applications. From an application's perspective, the application is always running. An application snapshot may consist of multiple processes and multiple threads and includes shared resources in use by a process, such as shared memory or semaphores. A process may be snapshotted & restored more than once. The computer on which a process is restored on must be identically configured and have an identical environment (hardware, software, and files) that matches the environment of the computer where the process was snapshotted. All processes that are snapshotted together in the form of an application chain share the same application ID ("AID"). As used herein, an application chain is the logical grouping of a set of applications and processes that communicate with each other and share resources to provide a common function.

The virtual environment 204 is a layer that surrounds application(s) 208 and resides between the application and the operating system 206. Resource handles are abstracted to present a consistent view to the application although the actual system resource handles may change as an application is snapshot/restored more than once. The virtual environment also allows multiple applications to compete for the same resources where exclusion would normally prohibit such behavior to allow multiple snapshots to coexist without reconfiguration. Preload library 214 is an application library that interposes upon an application for the express purpose of intercepting and handling library called and system calls. Once the library has been preloaded it is attached to the process' address space. Preload library 214 interposes between application 208 and operating system 206. It is distinguished from kernel interposition in that it operates in "user mode" (i.e., non-kernel and non-privileged mode). Application 208 can make application programming interface (API) calls that modify the state of the application. These calls are made from the application 208 to the operating system API interfaces 210 via the application snapshot restore framework 200 or the preload library 214. The preload library can save the state of various resources by intercepting API interface calls and then saves the state at a pre-arranged memory location. When the process' memory is saved as part of the snapshot/restore mechanism, this state is saved since it resides in memory. The state as it is modified is saved to

non-volatile storage (i.e. a file on disk). The preload library notify the snapshot/restore framework through one of its private interface.

FIG. 4 illustrates the capture of an application's run time state. The OS API interfaces 210 are standard programming interfaces defined by international standards organizations such as XOPEN. The open() system call which allows an application to open a file for reading is an example of an API interface. The process management system 216 is a component of the operating system 206 that allows one process to examine or alter the state of another process. The interfaces that are provided by this component are usually not standardized interfaces (not part of a recognized standard API) and are OS-implementation dependent. However, such interfaces usually allow access to more state than standardized API interfaces. The run-time information captured from a process is used by the snapshot driver 218.

An application needs to be snapshotted if it is idle and is not currently in use or there are higher priority requests that require the application be scheduled out and preempted in favor of another application. A snapshot request is initiated by an application scheduler that determines when an application needs to be restored on-demand and when the application is no longer needed (can be snapshotted to free up resources). The application scheduler does this based on web traffic, server load, request response time, and a number of other factors. An application needs to be restored if there is an incoming request (i.e. a web browser request) and the application required to handle that request (ie a particular web site) is not currently running. Alternatively, an application needs to be restored if there is an incoming request (i.e. a web browser request) and the application required to handle that request (ie a particular web site) is currently overloaded, so another instance of that application is restored to handle that request.

FIG. 5 illustrates the logical sequence of steps executed by Snapshot driver 218 to make a snapshot image of a process. Beginning at step 250, an snapshot image of a runnable application is requested. The AID is looked up (decision step 252) in a table in memory 154 containing a list of every AID present on computer 150. If the AID is not found control returns at step 254. However, if the AID is found, control continues to decision step 256 where the snapshot/restore framework 200 searches for a process belonging to the application having the matched AID. If a process is found, control continues to step 258, where the process is suspended. For a process to be snapshotted, it must be completely suspended with no activity present and no ambiguous state

(i.e., in a transitory state). Since a process may be represented by asynchronous threads of activity in the operating system that are not formally part of the process state, any activity in the operating system that is executing on behalf of the process must be stopped (i.e. disk I/O activity). In other words, there may be moments where temporarily a process cannot be snapshotted. This is a finite and short period of time, but it can occur. If the state is consistent and the threads are quiesced (decision step 260), control loops to step 256 and the remaining processes belonging to the application are located and suspended. However, if a process is located that does not have a consistent state or a thread is not quiesced, suspended processes are resumed and the snapshot cannot be completed.

Once all related processes are suspended, for each state of each suspended process, the state is checked to see if it is virtualized (step 264). A virtualized state is any process state that reflects a virtualized resource. If the state is virtualized, it is retrieved at step 266 ; otherwise the non-virtualized state is retrieved at step 268. State retrieval is performed as described above by the snapshot driver 218 querying the application snapshot/restore framework 200, operating system API interfaces 210, and process management subsystem 216. If the state has changed since the last snapshot (step 270), the new state is recorded. Control then loops to step 264 and executes through the above sequence of steps until all states of all processes are checked. Once completed, control proceeds to step 278, the registered global state, such as semaphores, is removed. Registered global state is state that is not specifically associated with any one process (ie private state). Global state is usually exported (accessible) to all processes and its state can be modified (shared) by all processes. Control proceeds to step 280, where the process is terminated. If there are remaining processes (step 282), these are also terminated. This sequence of steps is concluded to create a snapshot image which is stored as a file and made available for transmission to another computer within public computer network 100 or private computer network 106.

FIG. 6 illustrates the sequence of steps executed by the restore driver 220 to restore a snapshot image. The snapshot image is accessed via a shared storage mechanism and a restore call is made at step 300. The restore driver 220 looks up the AID for the snapshot image and (decision step 302) if not found control returns and the snapshot image cannot be restored. However, if the AID is found, control continues to decision step 304 where, if the snapshotted

of all processes occurs at step 332.

Once steps 300 through 332 have executed without error on whatever computer the restore driver 220 was executed, the restored application can continue to run without interruption. Thus, the present invention avoids the overhead and delay of shutting down an application, storing data to a separate file, moving both the application and data file elsewhere, and restarting the program.

B. Snapshot Virtual Templating

In another aspect, the present invention provides a system, method, and computer program product for creating snapshot virtual application templates for the purpose of propagating a single application snapshot into multiple distinct instances. Snapshot virtual templates allow multiple application instances to use the same fixed resource ID ("RID") by making the resource ID virtual, privatizing the virtual RID, and dynamically mapping it to a unique system resource ID. A RID is the identifier assigned to represent a specific system resource and acts as a handle when referencing that system resource. Anonymous resources are resources that are read-only or functionally isolated from other applications. Anonymous resources are also shareable resources. An anonymous resource is a non-fixed resource allocated by the operating system and identified by a per-process handle. These are functionally-isolated since the operating system allocates it anonymously and one is as good as another. Examples of this are non-fixed TCP ports or file descriptors. A resource is said to be network-wide unique if there can only be one instance of that resource with its corresponding identifier on computer network or subnetwork. An example of this is an network IP address (i.e. 10.1.1.1). Snapshot virtual templates allow snapshots to be described in a manner that separates shareable data from non-shareable data. Data is loosely defined to mean any system resource (memory, files, sockets, handles, etc.). When a snapshot is cloned from a virtual template, the common or shared data is used exactly as is, whereas the non-shareable data is either copied-on-write, multiplexed, virtualized, or customized-on-duplication. The present invention greatly reduces the required administrative setup per application instance. Snapshot virtual templating works by noting access to modified resources, fixed system IDs/keys and unique process-related identifiers and automatically inserting a level of abstraction between these resources and the application. The

resources contained in a snapshot virtual template can be dynamically redirected at restore time. Access to memory and storage is managed in a copy-on-write fashion. System resource handles are managed in a virtualize-on-allocate fashion or by a multiplex-on-access mechanism. Process-unique resources are managed in a redirect-on-duplicate fashion. Rules may be defined through an application configurator that allows some degree of control over the creation of non-salable data.

The application configurator is a software component that resides in the application domain and communicates configuration information about the application on its behalf such as the DSL specifications. Since this component operates without assistance from the application, it may exist in the form of an application library, or may be placed in the applications environment (via inheritance at execution time), or it can be implemented as a server process that proxies application information to the operating system as necessary.

A resource duplicator is a software component that fields requests for non-shareable resources and duplicates or virtualizes resources so that applications receive their own private copies and can co-exist transparently with multiple instances of the same application forged from the same virtual template. The resource duplicator also processes duplication rules fed by the application configurator or application snapshot/restore framework 200.

As used herein, non-salable data refers to any resource that is modified and globally visible to other application instances is non-salable (i.e. files). Process-related identifiers that are system-wide unique are also non-shareable since conflicts will arise if two instances use the same identifier at the same time (uniqueness is no longer preserved). References to unique resources by fixed handles (i.e. fixed TCP port numbers or IPC keys) are also not shareable. Memory pages that are specific to an application instance (i.e. the stack) are another example of a non-shareable resource. For illustrative purposes, examples of non-salable data include application config files that must be different per application instance as well as modified application data files if the application is not written to run multiple copies simultaneously. Other examples include stack memory segments or heap segments may also be non-salable data, shared memory keys that are a fixed value, usage of fixed well-known (to the application) TCP port numbers, and process identifiers (two distinct processes cannot share the same PID).

The snapshot virtual template is constructed automatically by dividing a snapshot process

into shareable and non-shareable data. The knowledge of which system resources can be shared is encoded in the snapshot virtual templating framework itself. If an application has non-shareable internal resources (as opposed to system resources), it may not be possible to construct a virtual-template for that application.

5 Snapshot virtual templates are node-independent as well as application-instance dependent. Snapshot virtual templates cannot be created for applications that use non-shareable physical devices. Snapshot virtual templates must save references to non-shareable resources in their pre- customized form, rather than their evaluated form. All access by an application to non-shareable resources must be via the operating system. Internal or implicit dependencies by the
10 application itself cannot be virtually-templated. A snapshot virtual template may be created from an application instance that was originally forged from a different virtual template.

 Snapshot virtual templating is an alternate method of creating an application instance. The snapshot restore method described above requires creating unique instances of an application to create unique “snapshots” of that application. Virtual templating allows the creation of a
15 generic application instance from which unique instances may be spawned. Every unique instance that is created from the original virtual template starts out as an exact copy (referred to herein as “clone”) but has been personalized just enough to make it a fully-functioning independent copy. Differences between copies may be due to the way resources are named or identified.

20 FIG. 7 illustrates in block diagram form the contents of a snapshot virtual template. The main components are resource name size, resource descriptor size, resource type, resource name, and resource data. Resource data includes many different types of information, as illustrated.

 FIG. 8 describes the sequence of steps executed by the application snapshot/restore framework 200 to create a snapshot virtual template. As the application runs, every request for
25 a new operating system resource (file, memory, semaphore, etc.) is checked for an existing rule. When the application is started under the virtual templating framework, a set of rules may be supplied at that time. The rule will state the type of resource, the type of access (i.e., create, read, write, destroy, etc), and the action to be taken. If a rule is found (decision step 360), the rule is saved as part of the process state and recorded with the resource as auxiliary state at step 362.

30 Rules may be added to the template that control the creation of application-instance specific

resources. For example, environment variables or pathnames that incorporate an AID to differentiate and customize a particular resource among multiple instances. The following syntax created for illustration purposes:

5	Define	<APPL-ID> as PROPERTY application-ID
	REDIR PATH	“/user/app/config” to “/usr/app/<APPL-ID>/config”
	SET ENV	“HOME” = “/usr/app/<APPL-ID>”

10 If rules are created, they should also be specified via the application configurator. If no rule is found, the resource is checked using a standard set of criteria that determine whether the resource needs to be abstracted or virtualized in order to be cloned at step 364. The criteria is again checked at steps 366, 370, 372, 378, 380 and 386. In most cases, no action is taken. Resources are simply classified into their correct types so that when an instance is cloned the correct action can be taken. If the resource is shared, i.e. shared memory (decision step 366), the resource is marked as shared (step 368) so that during the subsequent snapshot all references to the shared object will be noted. If the resource can be modified (decision step 370), it must be isolated from the original during cloning so that the original remains untouched. If the resource is a large object and has a notion of an underlying object, such as i.e. mapped memory (decision step 372), it is marked for copy-on-write (step 374). Otherwise, the entire resource must be duplicated and marked accordingly (step 376). A resource is said to be systemwide unique if the identifier used to represent that resource cannot represent more than one instance of that resource at a single point in time on the same node or computer. If the resource is systemwide unique (decision step 378), and is exported as an external interface, as is the case when another client application that is not running on the platform has a dependency on the resource, such as a TCP port number (decision step 380), it isn't feasible to virtualize access to the resource, so it is marked to be multiplexed (step 382). Multiplexing allows multiple independent connections to transparently co-exist over the same transport using only a single identifiable resource. If it isn't externally exported, the resource is marked for virtualize at step 384. Continuing to decision step 386, if the resource is network-unique, it is marked for allocation at step 388. Control proceeds to step 390, where the resource request is processed. Steps 360 through 390 are repeated for

every resource request occurring during application execution.

FIG. 9 illustrates the sequence of steps executed to perform cloning or replication of a process from a snapshot virtual template. This sequence of steps can be performed by a replication program that creates a new snapshot image from an existing template, or by the restore driver 220. When an application instance is restored from a snapshot that is a virtual template, a new instance is automatically cloned from the template using the rules that were gathered during the creation of the template. For every resource included in the snapshot virtual template, rules for the resource and access type are looked up. Any resource that requires special handling as part of the templating effort has the rule described inside the snapshot template as part of the auxiliary state associated with the resource. If no rule is found (decision step 400), the resource is recreated using the existing saved information in the snapshot (step 402). Otherwise, if a resource is marked for duplicate (decision step 404), then a copy of the original resource is made at step 406. If a resource is marked for copy-on-write (decision step 408), then at step 410 a reference to the original underlying object (in the original template) is kept, and any modifications to the original force a copy-on-write action so that the modifications are kept in an application-instance private location and the two form a composite view that is visible to the application instance.

If a resource is marked for virtualization (decision step 412), the original resource is allocated or duplicated in blank form at step 414. At step 416, the resource is mapped dynamically to the new resource at run-time by binding the system resource to the saved resource in the snapshot image. If a resource is marked for multiplex (decision step 418), the original resource is duplicated and then spliced among other application instances that share it (step 420). If the resource is a network unique resource (decision step 422), a unique resource must be allocated (step 424) by communicating with another component of the network, i.e. network map or registry, that assigns a resource to this instance. Then this new resource is bound to the fixed resource that was saved in the virtual template (step 426), in a manner similar to virtualization.

C. Virtual Resource ID Mapping

The present invention provides virtual mapping of system resource identifiers in use by a software application for the purpose of making the running state of an application node

independent. By adding a layer of indirection between the application and the resource, new system resources are reallocated and then can be mapped to the application's existing resource requirements while it is running, without the application detecting a failure or change in resource handles.

5 This layer of indirection makes the application's system RID transparent to the application. RID's are usually numeric in form, but can also be alphanumeric. RID's are unique to a machine, and can be reused once all claims to a specific RID have been given up. Some examples of RID's include process ID's, shared memory ID's, and semaphore ID's. Only the virtual RID is visible to the application. Conversely, the virtual RID is transparent to the OS,
10 and only the system RID is visible to the OS. Every application has a unique identifier that distinguishes it from every other running application. There exists a one to one mapping between the AID: resource type: virtual RID combination and the node ID: system RID. Virtual RID's are only required to be unique within their respective applications, along with their corresponding system RID's may be shared among multiple programs and processes that have the same AID. System RID's that have been virtualized are accessed through their virtual ID's to ensure consistent states.

15 AID's are farm-wide unique resources and are allocated atomically by the AID generator. Because in the present invention applications aren't uniquely bound to specific names, process ID's, machine hostnames or points in time, the AID is the sole, definitive reference to a running application and its processes. Typically, an AID is defined in reference to a logical task that the application is performing or by the logical user that is running the application.

20 Virtual resource mapping comprises several basic steps: application registration, allocation of the RID, and resolution of the RID. During registration of the application, the AID is derived if preallocated or the application existed previously, or it may be allocated
25 dynamically by an AID generator. The AID is then made known for later use. Allocation of a RID happens when an application requests access to a system resource (new or existing) and the OS returns a handle to a resource in the form of a RID. The virtual resource layer intercepts the system returned RID, allocates a virtual counterpart by calling the resource specific resource allocator, establishes mapping between the two, and returns a new virtual RID to the application.

30 Resolution of a RID may occur in two different directions. A RID may be passed from

the application to the OS, in which case the RID is mapped from virtual ID to system ID. Conversely, the RID may be passed from the OS to the application, in which case the transition is from system ID to virtual ID. Requests for translation are passed from the framework to the virtual RID translation unit and the corresponding mapping is returned once it has been fetched from the appropriate translation table. Multiple translation tables may exist if there are multiple resource types.

FIG. 10 illustrates the steps executed to register an application. The AppShot harness 500 exists to aid in the creation of the appropriate runtime environment for the application prior to launching the application. The appshot harness 500 initializes the runtime environment for an application by first priming its own environment with the appropriate settings and then launching the application which inherits all these settings. The appshot harness 500 is provided because the application cannot be recompiled or rewritten to initialize its own environment. Some of the settings that are established by the appshot harness 500 include the AID, assigned process ID range, DSL specifications, application virtual ID's, and snapshot templating rules. The DSL specifications are registered as part of the environment. A process is an in-memory instantiation of a software program. Process_x is the in-memory image of the AppShot harness 500 and process_y is the in-memory image of the application. At step 510, the appshot harness 500 registers an AID a_i, such as "dbserver," with the application snapshot/restore framework 200 within the OS kernel 206. The application snapshot/restore framework 200 then creates virtual translation tables 502 for the AID at step 512. Virtual translation tables 502 are data units that contain translation information related to RID's, such as AID's or process ID's, virtual RID's, and system RID's. Separate tables can be implemented per resource type or a table can be shared if a unique resource type is stored per table entry. A translation unit maps the system RID's to the virtual RID's by storing and fetching translation information in the appropriate translation table. Once the virtual translation tables 502 are created, Process_x is linked to the AID a_i at step 514. At this point, process_y is created when the appshot harness 500 launches the application at step 516. Process_y then inherits process_x's link to a_i and its tables at step 518.

FIG. 11 shows the allocation of a virtual resource such as a semaphore in accordance with the present invention. At step 520, an application requests that a semaphore resource is allocated for its process_y. In response (step 522), the application snapshot/restore framework 200 looks up

the AID in memory 154, and returns AID a_i . At step 524, in response to a request from the application snapshot/restore framework 200, the system semaphore pool returns semaphore s_i . At step 526, the application snapshot/restore framework 200 scans the virtual resource translation table 502 for an available slot and allocates the virtual semaphore. At step 528, the application snapshot/restore framework 200 inserts the translation $s_i = a_i:v_3$ and the virtual resource translation table 502 now contains the mapping. At step 530, the virtual semaphore v_3 is returned to the application.

FIG. 12 illustrates translation of a virtual resource to a system resource in accordance with the present invention. At step 532, the application calls the semaphore interface and supplies the virtual RID v_3 to the application snapshot/restore framework 200. At step 534, the application snapshot/restore framework 200 looks up the AID for the calling application and returns a_i . At step 536, the application snapshot/restore framework 200 then looks up the translation for $a_i:v_3$ in the virtual resource translation table 502, which returns s_i at step 538. At step 540, the OS semaphore implementation is achieved when the application snapshot/restore framework 200 forwards the application's request by substituting s_i for v_3 .

FIG. 13 illustrates translation of a system resource to a virtual resource. Beginning at step 542, the application calls the semaphore interface and expects the RID as a result. At step 544, the application snapshot/restore framework 200 looks up the AID for the calling application and returns a_i . At step 546, the application snapshot/restore framework 200 forwards the application request to the OS semaphore implementation, which returns the system semaphore s_i at step 548. At step 550, the application snapshot/restore framework 200 then looks up the translation for $a_i:s_i$ in the virtual resource translation table 502, which returns v_3 at step 552. At step 554, the application snapshot/restore framework 200 returns the virtual RID v_3 to the calling application.

FIG. 14 illustrates the logical sequence of steps executed to create the virtual translation table 502. Beginning at step 556, an attempt is made to register AID a_i . If the AID hasn't already been registered (decision step 558), a virtual resource translation table space for a_i is created in table 502 (step 560). Translation tables are then added for each type of resource associated with the application at step 562. At step 564, the process_x is linked to a_i . At step 566, the process_y is created and the application is launched. Steps 568 and 570 show the parallel paths

of execution. The flow of control continues on to step 568 and halts shortly thereafter. The new flow of execution continues on from 566 to 570, where the process inherits context from the process at step 568.

FIG. 15 illustrates in greater detail the sequence of steps executed to translate a virtual resource. For illustrative purposes, the resource in this example is a semaphore. Beginning at decision step 580, if an AID is found upon lookup, and the interface uses the RID as a parameter (decision step 582), the application snapshot/restore framework 200 performs a lookup of the translation for $a_1:v_1$ at step 584. If a system resource s_1 is found, the system RID is substituted for the virtual RID at step 586 and passed to the semaphore interface of the OS 206 (step 588). If the semaphore was not allocated by the semaphore interface (decision step 590), and the interface returns a semaphore (decision step 592) control proceeds to step 594 where a reverse lookup for the translation of the AID with a system RID is performed. The returned virtual RID is then substituted for the virtual ID at step 596. Returning to decision step 590, if a semaphore was allocated by the semaphore interface, control proceeds to step 598 where the virtual semaphore is allocated and a translation for $v_2 = a_1:s_2$ is inserted into the translation table 502 at step 600. V_2 is then substituted for s_2 at step 602.

In another aspect, the present invention provides communication between at least two applications through virtual port multiplexing. The communication is achieved by accepting a connection from a second application on a first port and allocating a second port to receive the communication from the second application. Once the second port has been allocated the second port translation is recorded. The communication is sent to the first port from the second application and received on the second port. The communication is then delivered to a first application from the second port. In one embodiment the first application requests the communication from the first port and the first port is translated to determine the second port such that the communication is delivered to the first application in the step of delivering the communication to the first application.

In one embodiment, the communication is received on the first port following the step of sending the data to the first port, the first port is translated to determine the second port prior to the step of receiving the communication on the second port, and the step of receiving the communication on the second port includes queuing the communication on the second port from

the first port.

In one embodiment, the second application requests to connect with the first port prior to the step of accepting the connection. Once the second port is allocated, the second port is negotiated including negotiating the second port between a first and second virtual port multiplexer. Further, the second application is connected with the second port following the step of allocating the second port. The step of recording the translation including, first, recording the translation of the second port in association with the first application, and second, recording the translation of the second port in association with the second application.

The present invention also provides for a dynamic symbolic link (DSL) and the resolution of that DSL. The pathname of a first application is renamed to a target pathname, a variable within the target pathname, the first pathname is defined as a symbolic link and the symbolic link is associated with a virtual pathname. The method and apparatus further defines a specification is further defined that is associated with the virtual pathname including associating the variable with the virtual pathname. In associating the symbolic link with the virtual pathname, a declaration is defined within the virtual pathname.

Having disclosed exemplary embodiments and the best mode, modifications and variations may be made to the disclosed embodiments while remaining within the scope of the present invention as defined by the following claims.

CLAIMS

What is claimed is:

1. In a computer system, a method saving a running software application for execution at a later time, the application being associated with a process having a state and an environment,

comprising the steps of:

(a) associating a unique identifier with a running software application to be saved;
(b) virtualizing the process environment associated with said running software application;

(c) recording process events that change the state of the process;

(d) saving process state in the form of a snapshot image; and

(e) saving shared resource state relevant to said snapshot image with said snapshot image.

2. The method of claim 1, further including the step of saving modified memory pages relevant to said snapshot image with said snapshot image.

3. The method of claim 1, further including the step of saving states associated multiple threads relevant to said snapshot image.

4. A method of restoring to a running state a software application stored in a running state with necessary processes, process state information, memory information, and dependency information, comprising the steps of:

(a) matching said stored software application with an application identifier;

(b) locating all stored processes stored with said software application;

(c) recreating global/shared state;

(d) creating a process that inherits the global/shared state;

(e) isolating the global/shared state process from other processes;

(f) For each type of state stored within the stored software application, bind system state to a virtual definition if the state is virtualized, reconnect the state to any processes the state is shared with, and place the state in synchronized wait;

- (g) removing traces and states induced; and
- (h) performing a synchronized resume of all processes.

5. A computer program product, which, when executed by a computer, saves a running software application for execution at a later time, the application being associated with a process having a state and an environment, by performing the steps of:

- (a) associating a unique identifier with a running software application to be saved;
- (b) virtualizing the process environment associated with said running software application;


- (c) recording process events that change the state of the process;
- (d) saving process state in the form of a snapshot image; and
- (e) saving shared resource state relevant to said snapshot image with said snapshot image.

6. A computer program product, which, when executed on a computer, restores to a running state a software application stored in a running state with necessary processes, process state information, memory information, and dependency information, executing the steps of:

- (a) matching said stored software application with an application identifier;
- (b) locating all stored processes stored with said software application;
- (c) recreating global/shared state;
- (d) creating a process that inherits the global/shared state;
- (e) isolating the global/shared state process from other processes;
- (f) For each type of state stored within the stored software application, bind system state to a virtual definition if the state is virtualized, reconnect the state to any processes the state is shared with, and place the state in synchronized wait;
- (g) removing traces and states induced; and
- (h) performing a synchronized resume of all processes.

ABSTRACT


The present invention saves all process state, memory, and dependencies related to a software application to a snapshot image. Interprocess communication (IPC) mechanisms such as shared memory and semaphores must be preserved in the snapshot image as well. IPC mechanisms include any resource that is shared between two process or any communication mechanism or channel that allow two processes to communicate or interoperate is a form of IPC. Between snapshots, memory deltas are flushed to the snapshot image, so that only the modified-pages need be updated. Software modules are included to track usage of resources and their corresponding handles. At snapshot time, state is saved by querying the operating system kernel, the application snapshot/restore framework components, and the process management subsystem that allows applications to retrieve internal process-specific information not available through existing system calls. At restore time, the reverse sequence of steps for the snapshot procedure is followed and state is restored by making requests to the kernel, the application snapshot/restore framework, and the process management subsystem.

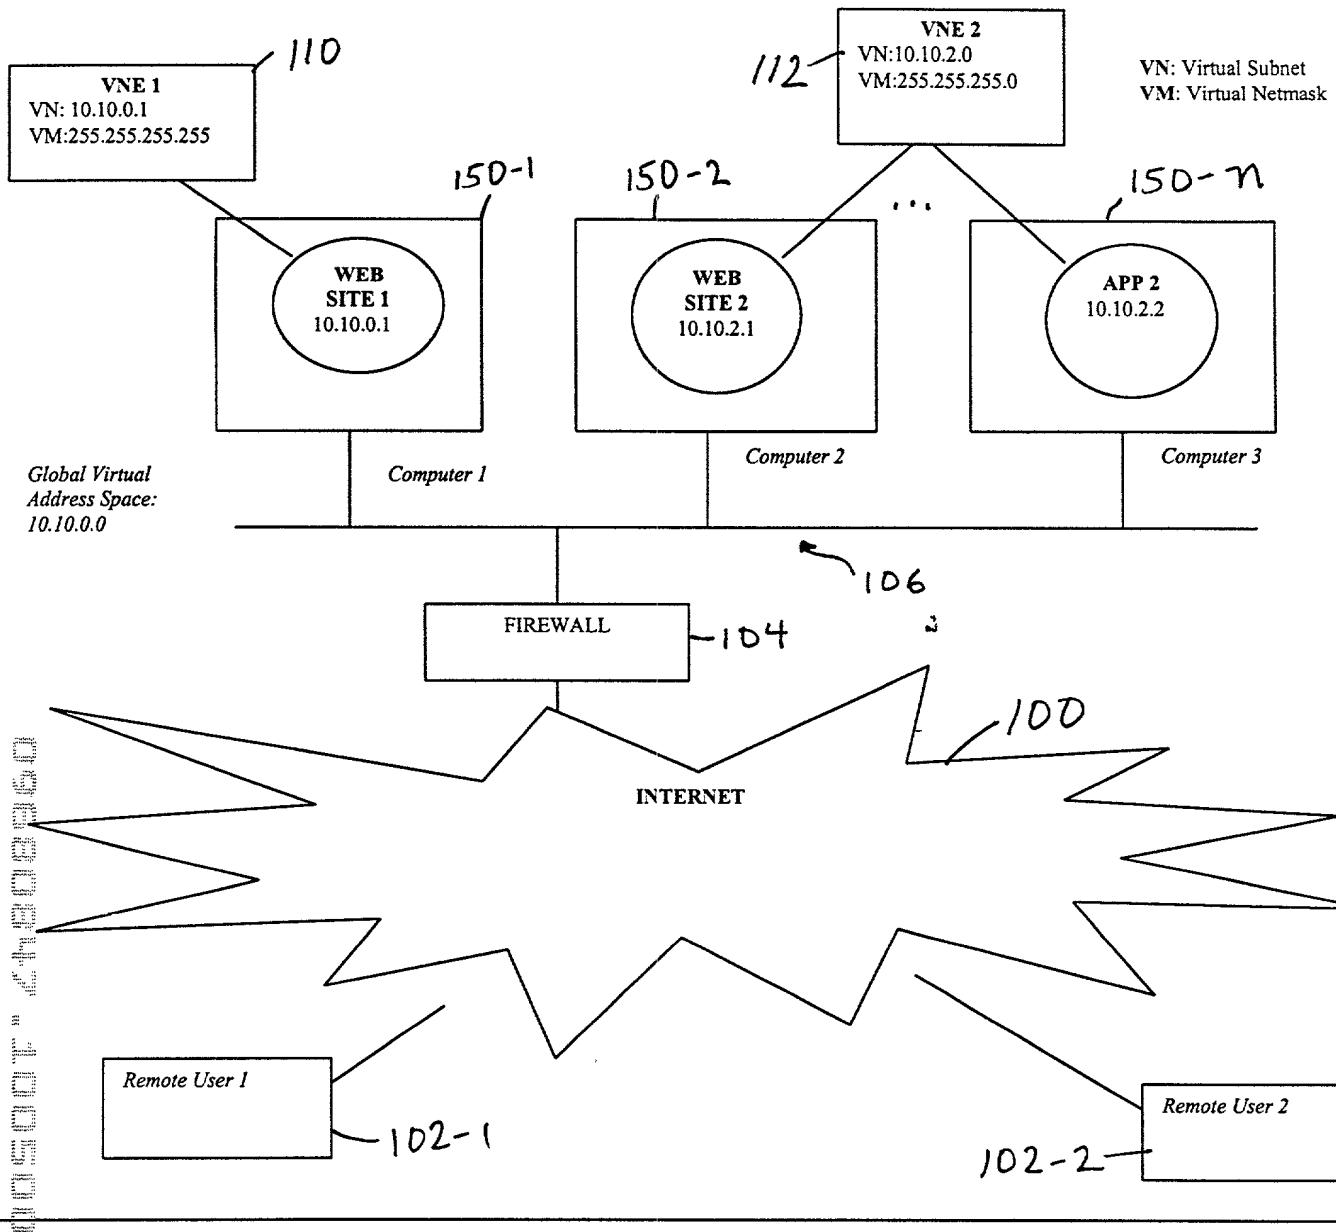


The above diagram illustrates the virtual network environments. Virtual Network Environment 1 contains one application WEB SITE 1, is defined by the Virtual Network Address 10.10.0.1 resides solely on computer 1. Virtual Network Environment 2 contains two applications, WEB SITE 2 and APP 2, and spans two computers, Computer 2 and Computer 3. The virtual network of VNE 2 is 10.10.2.0.

FIG. 1


FIG. 2

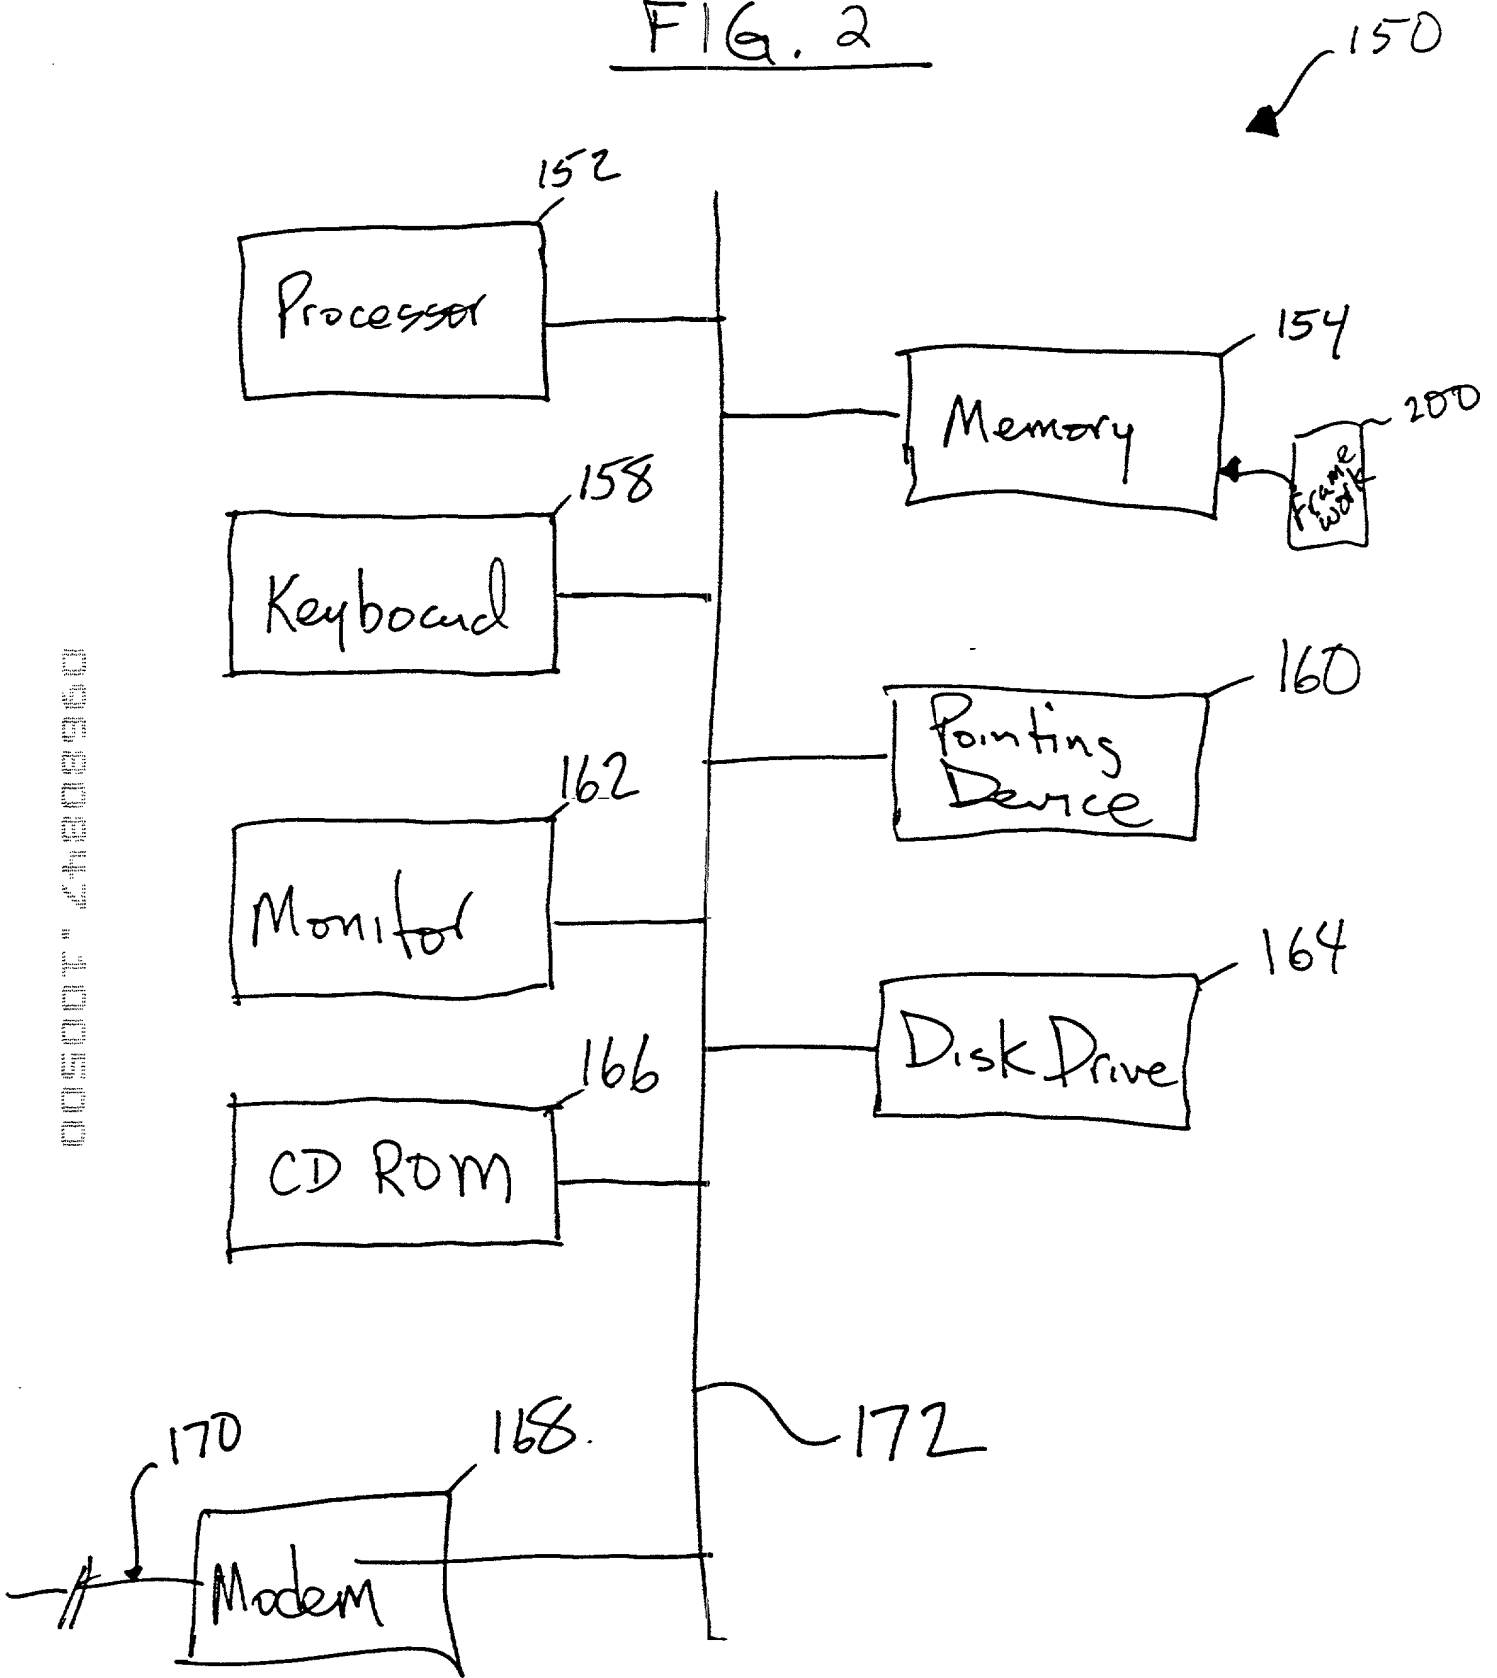

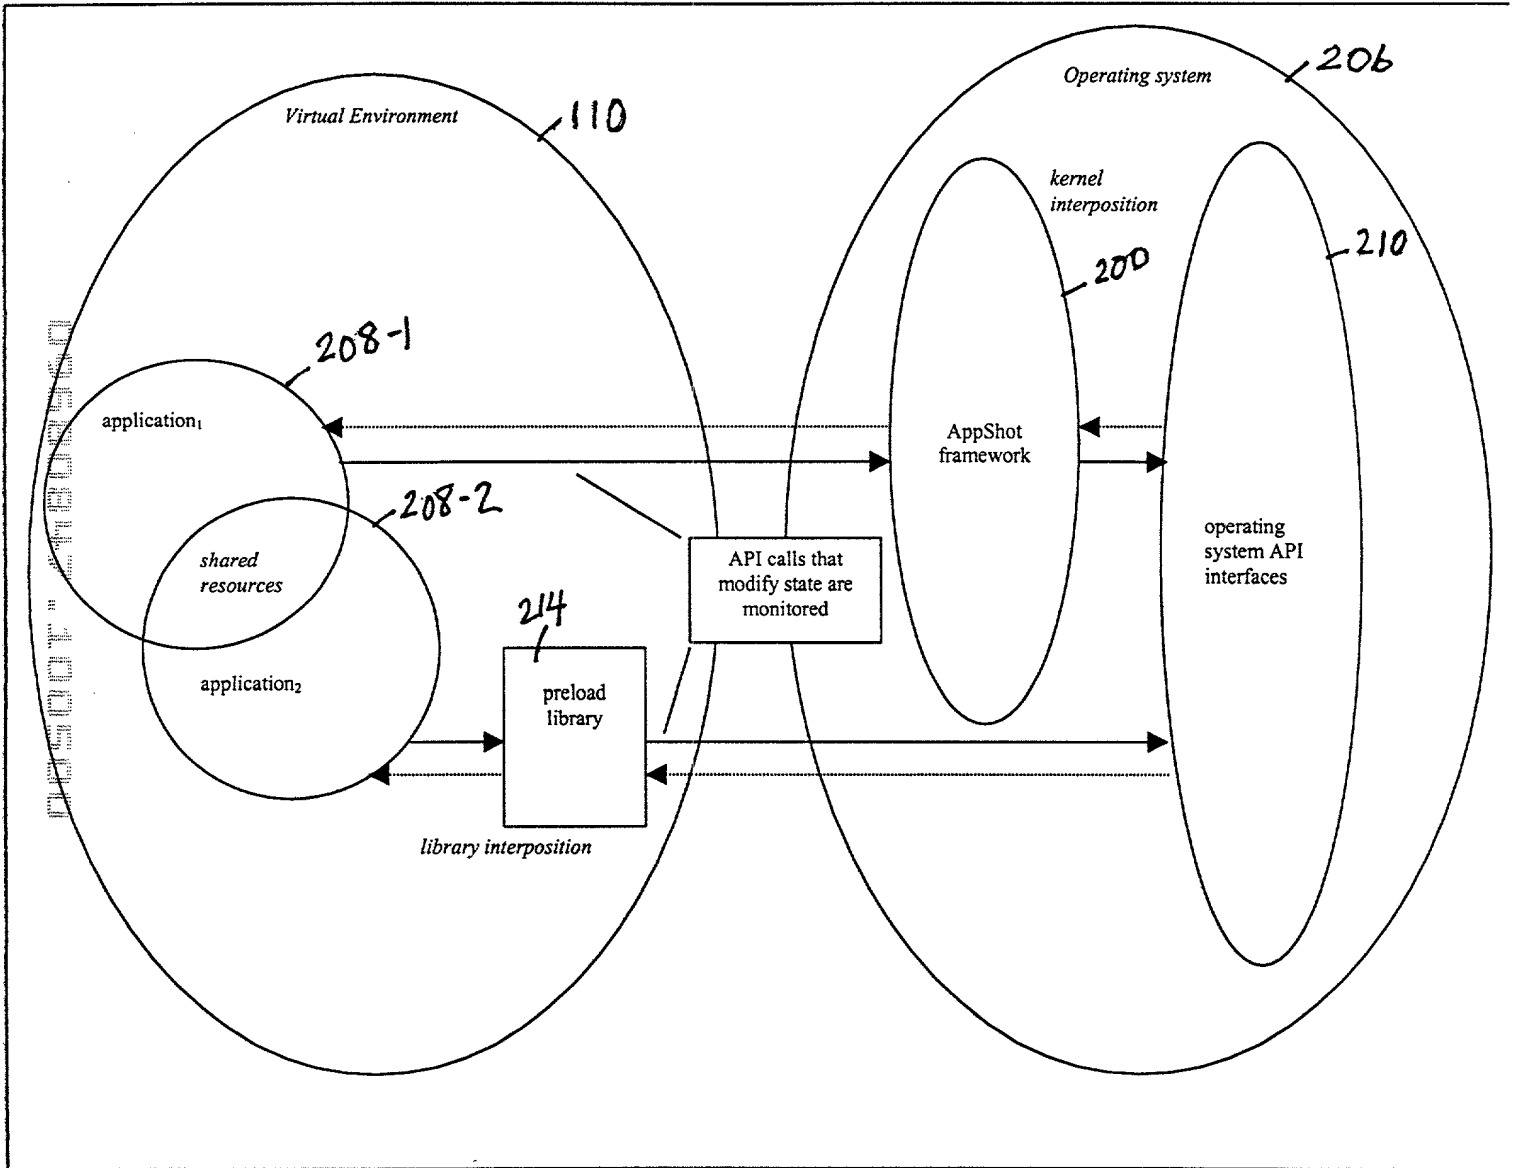

Tracking application state via library and kernel interposition.

FIG. 3

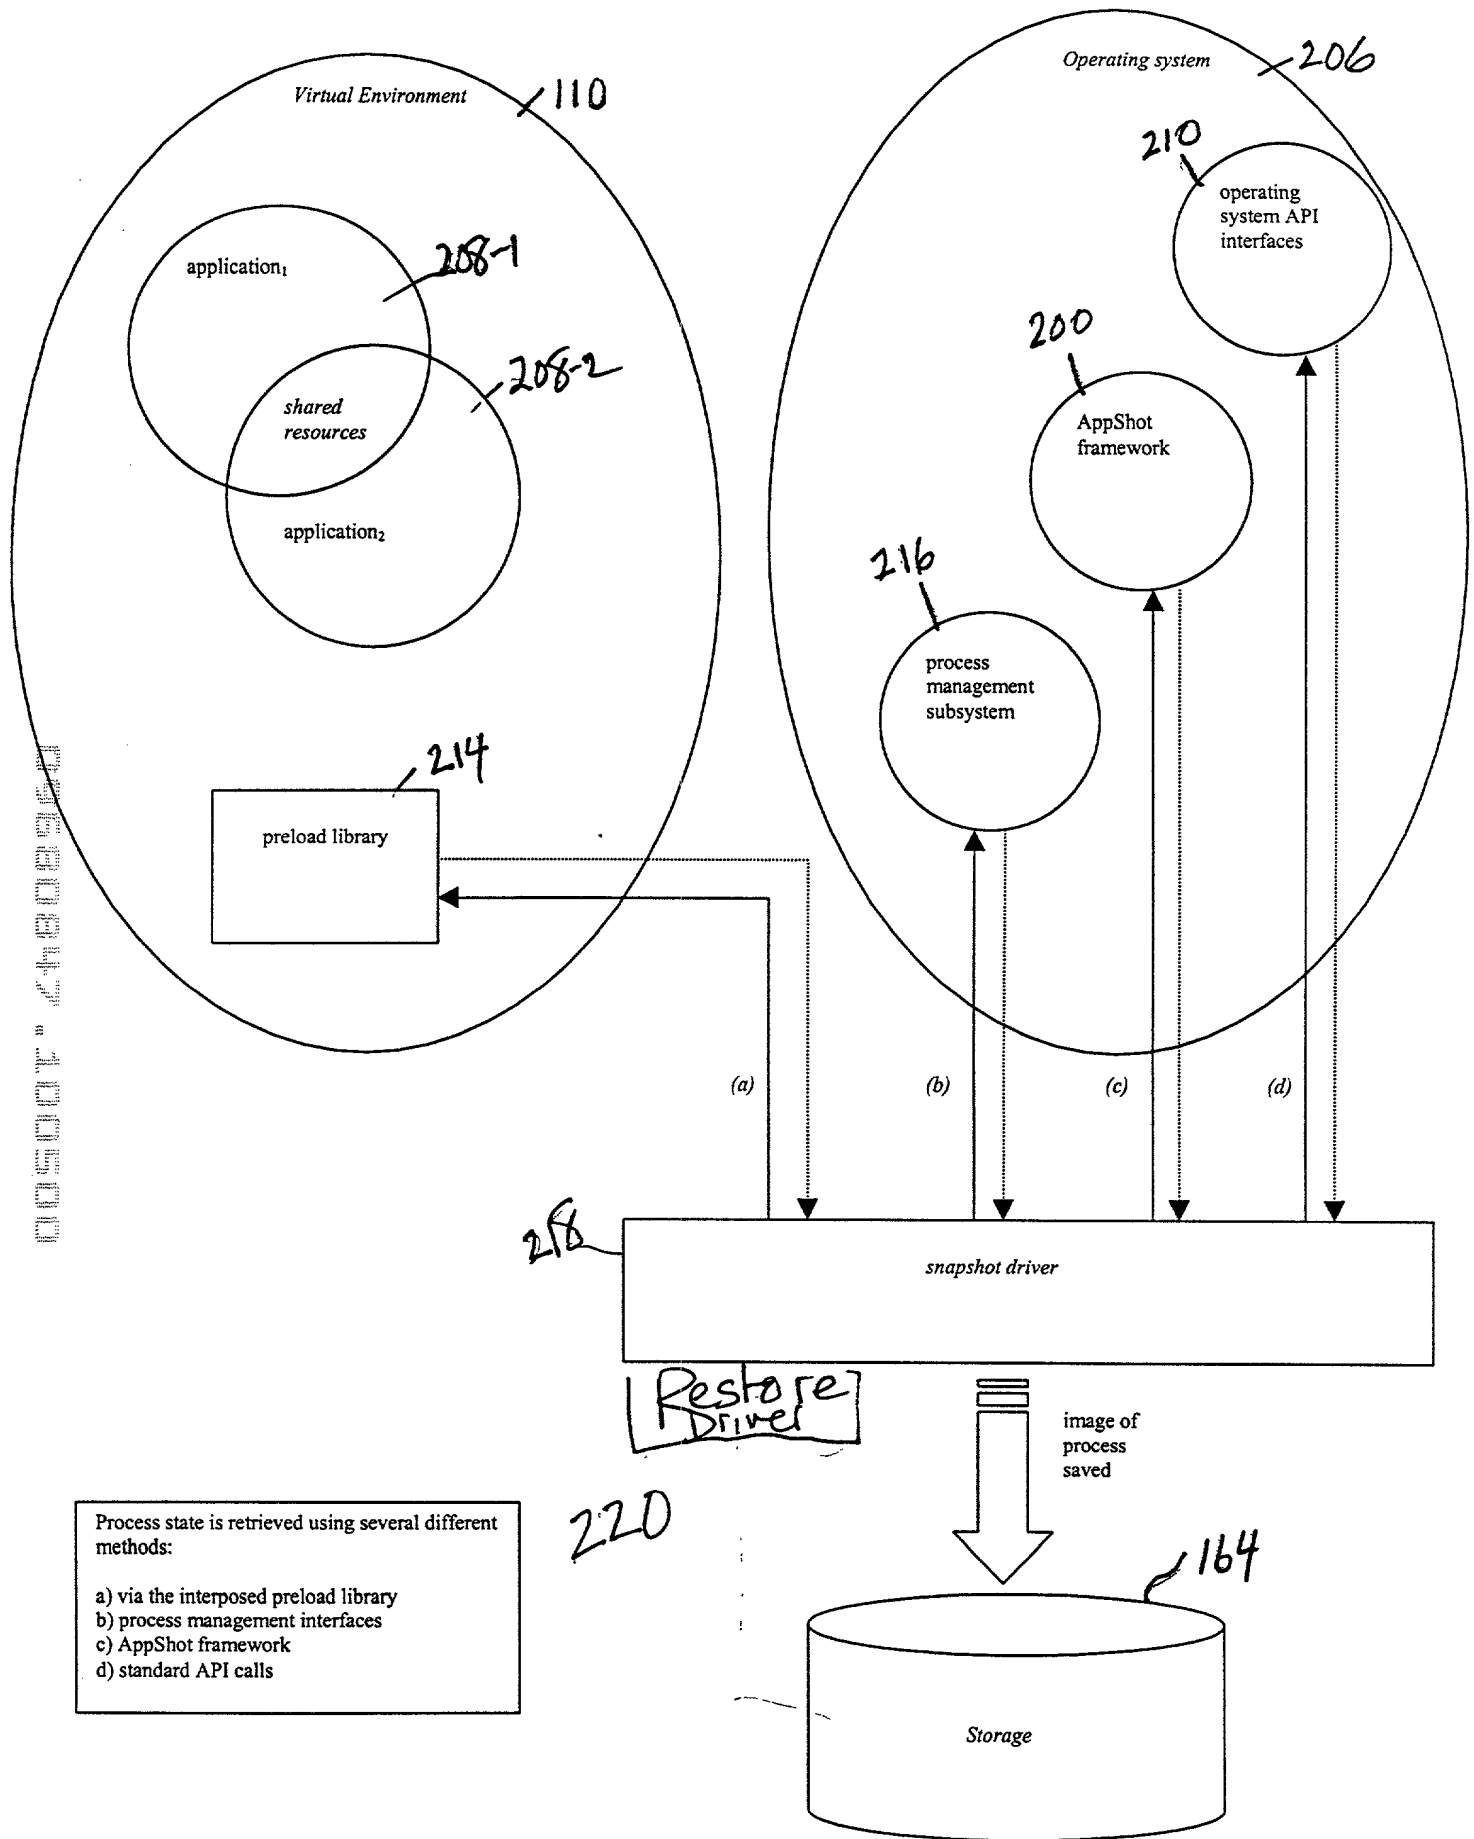

Capture of an application's run-time state.

FIG. 4

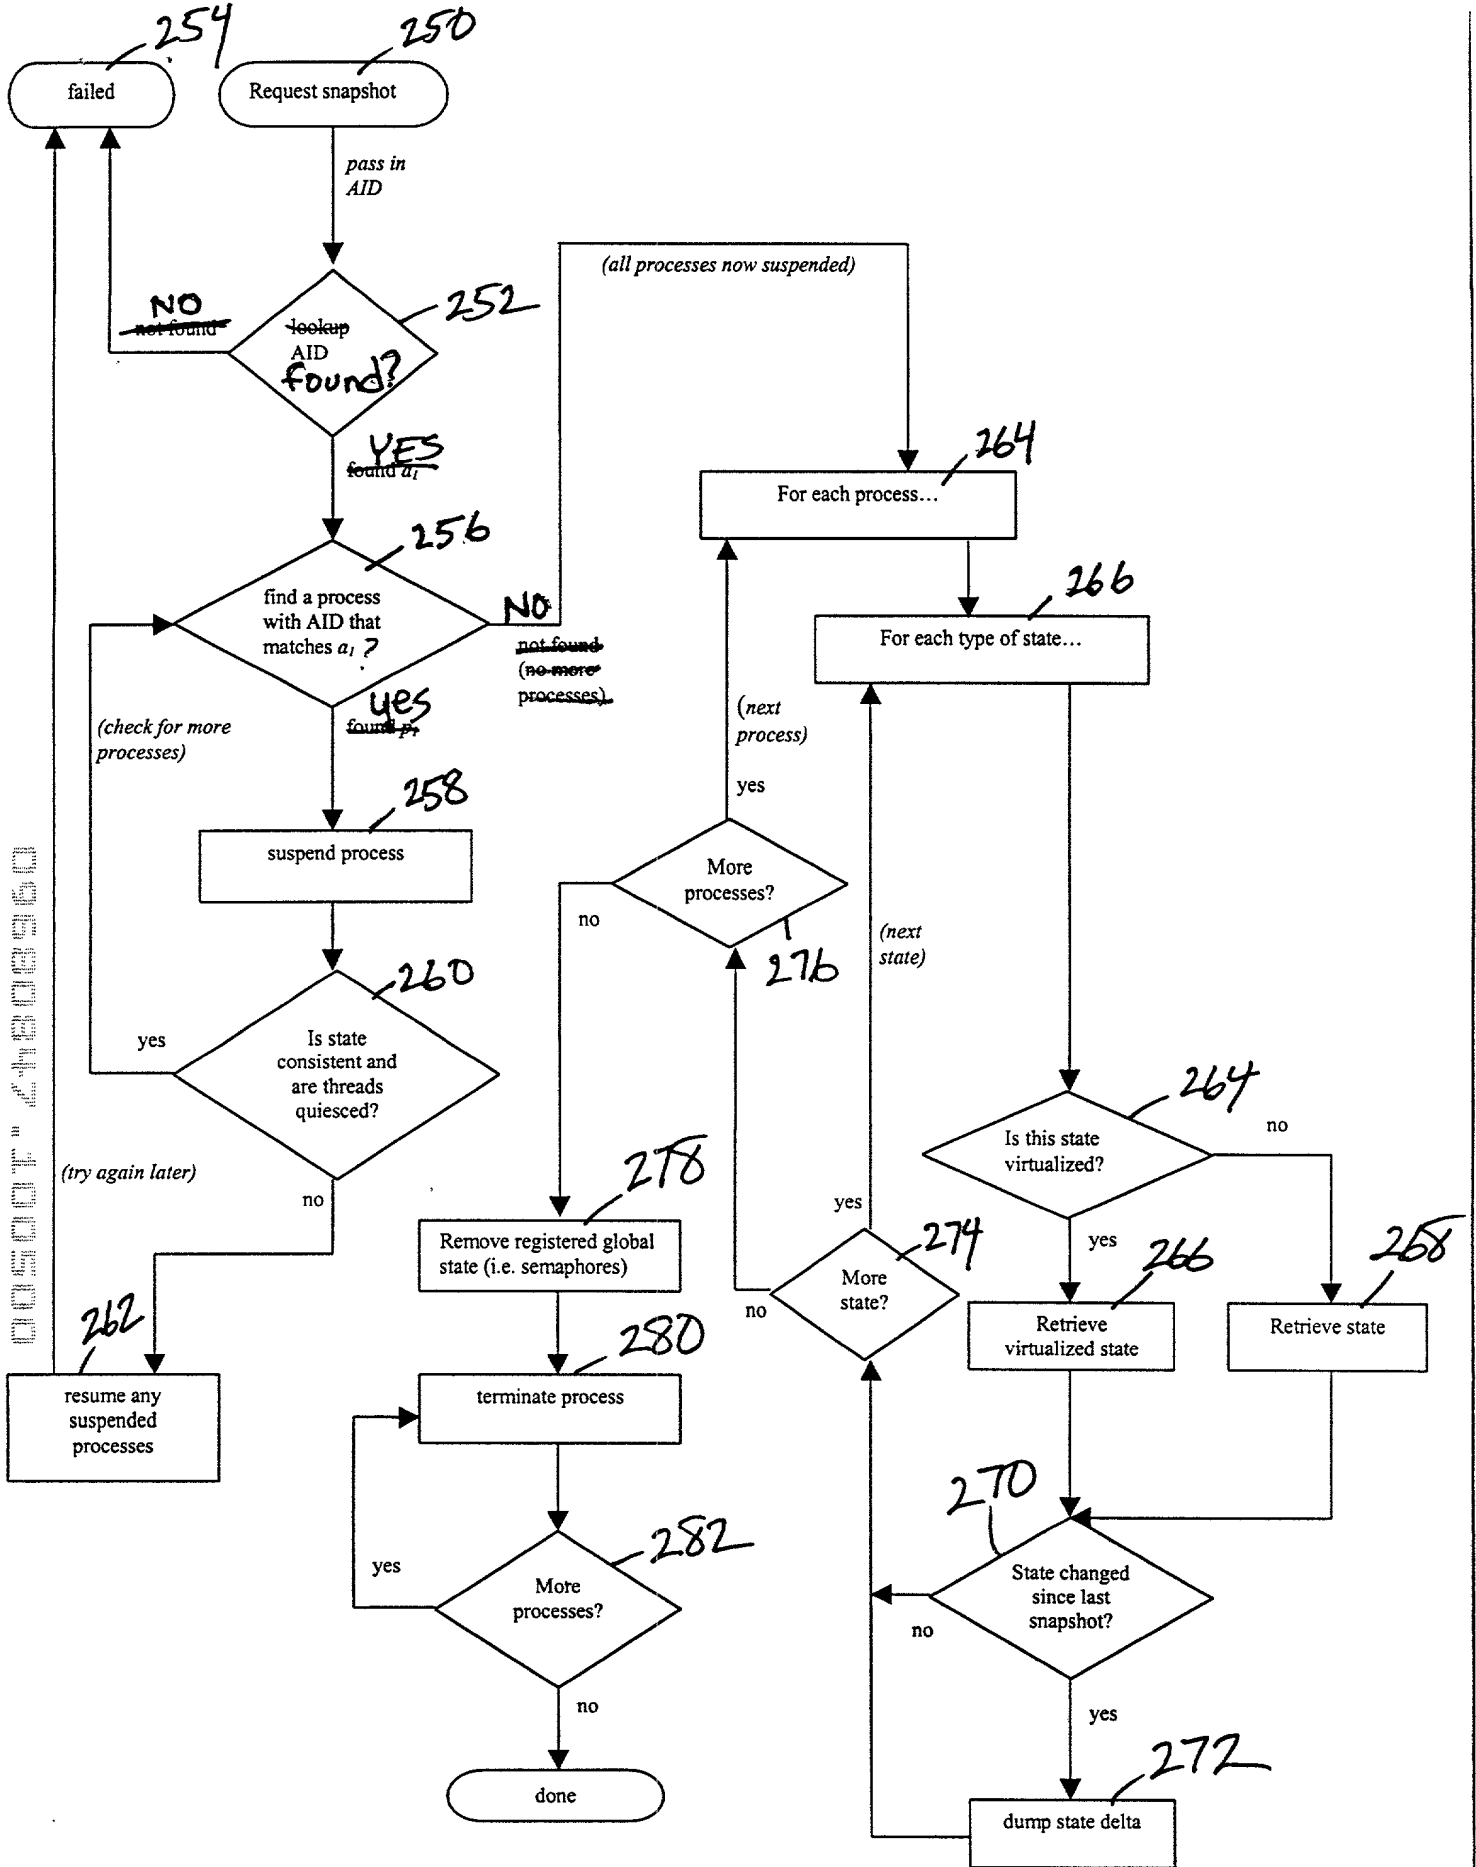


FIG. 5

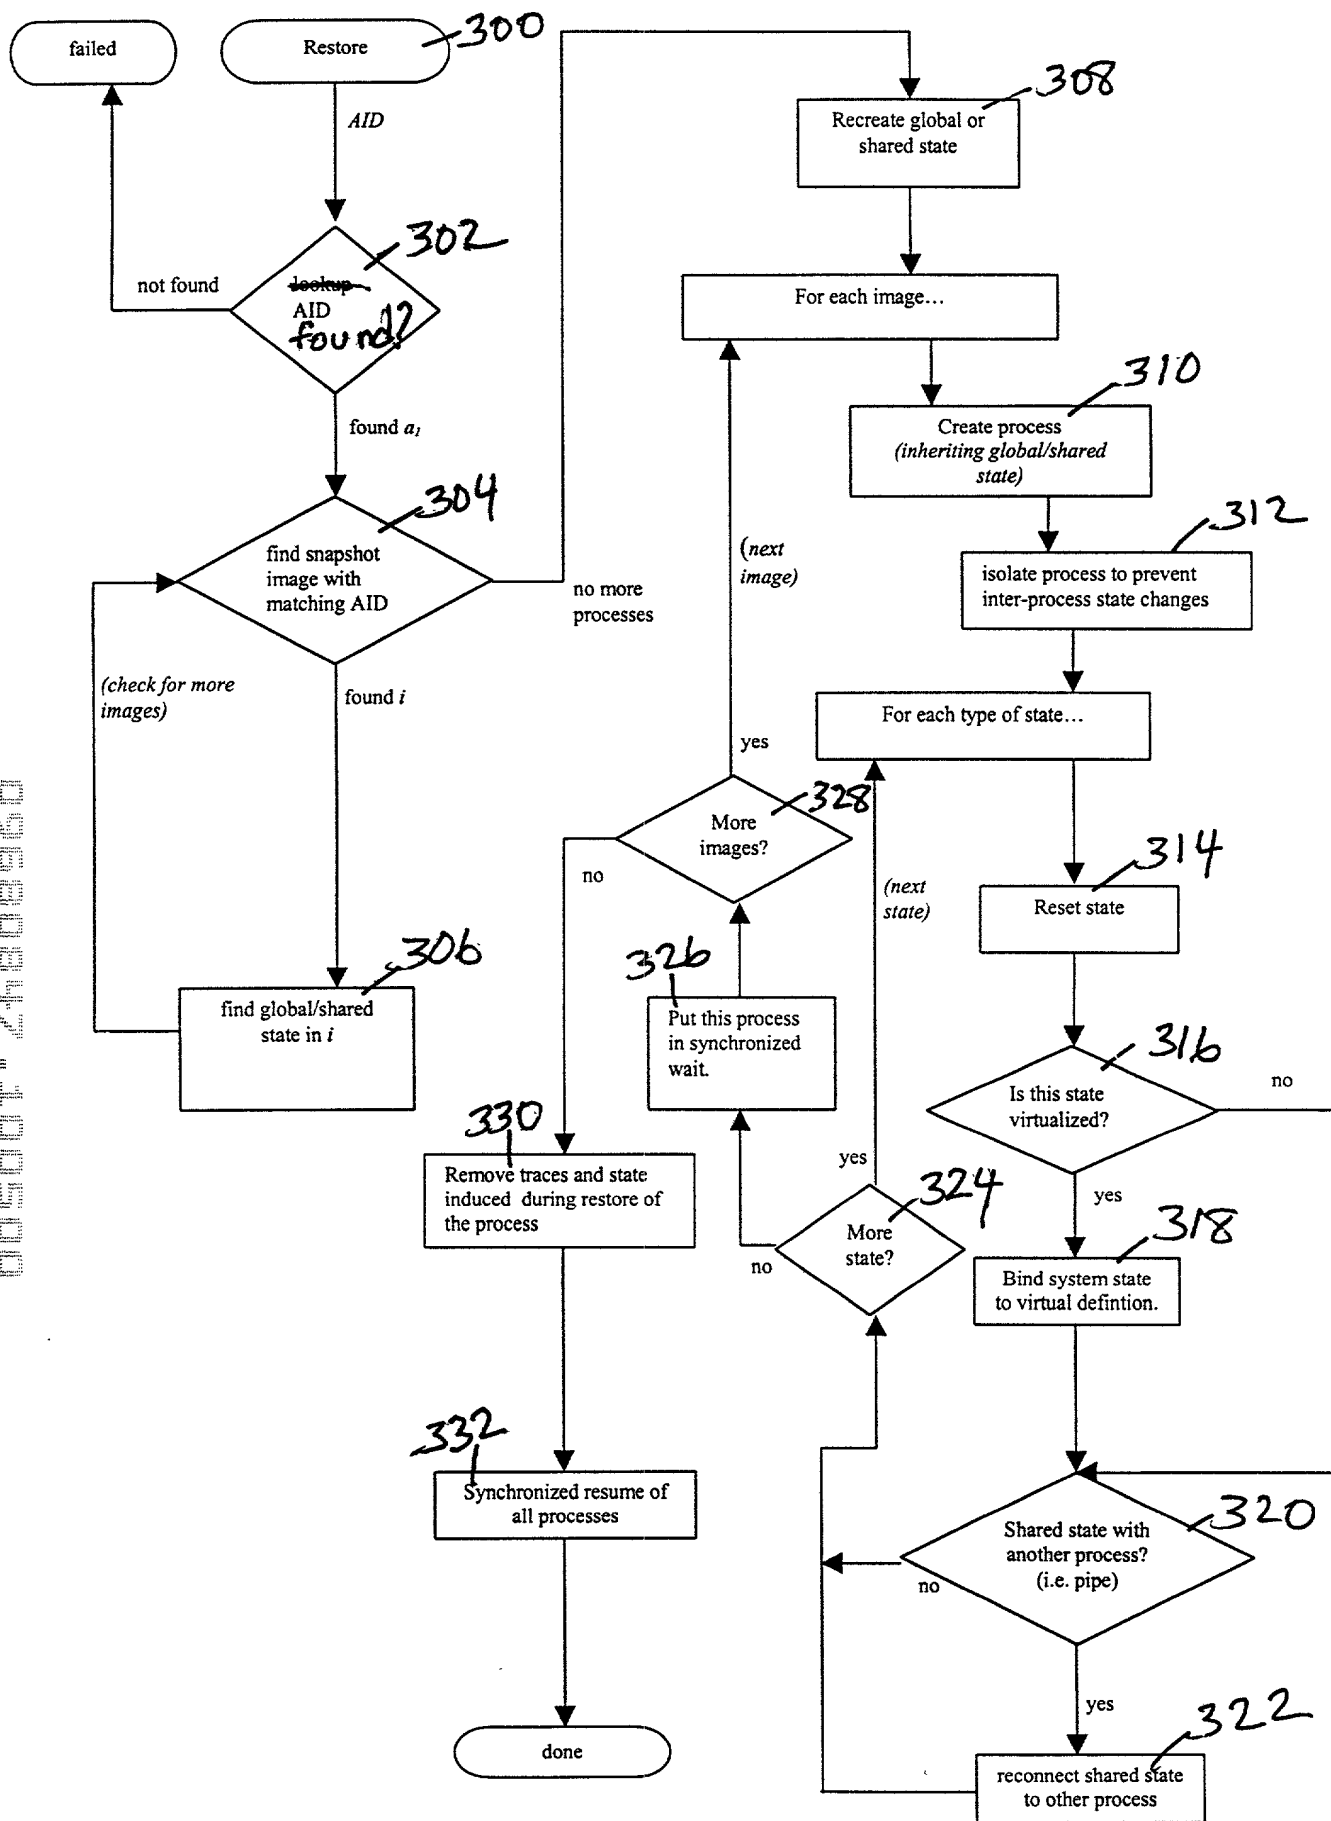


FIG 6

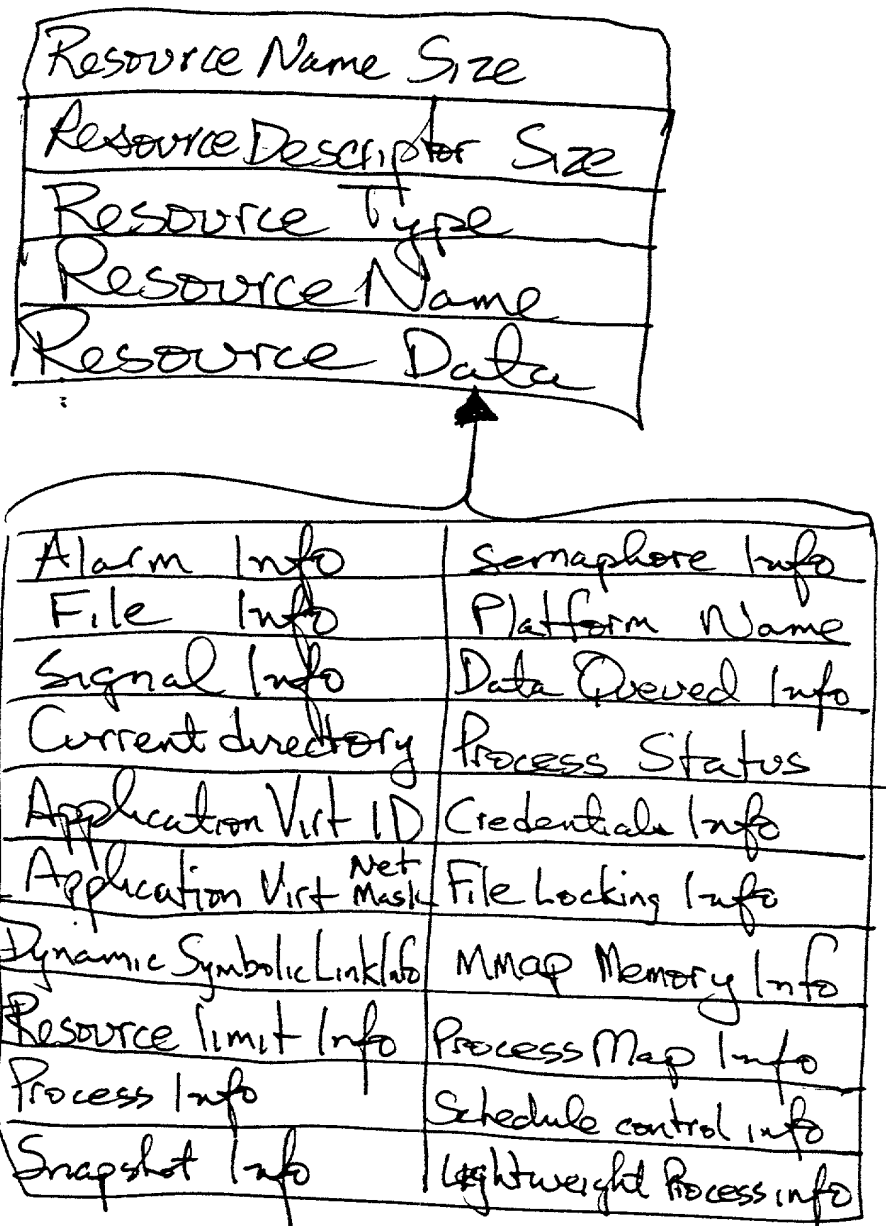


FIG. 7

0050047-10500

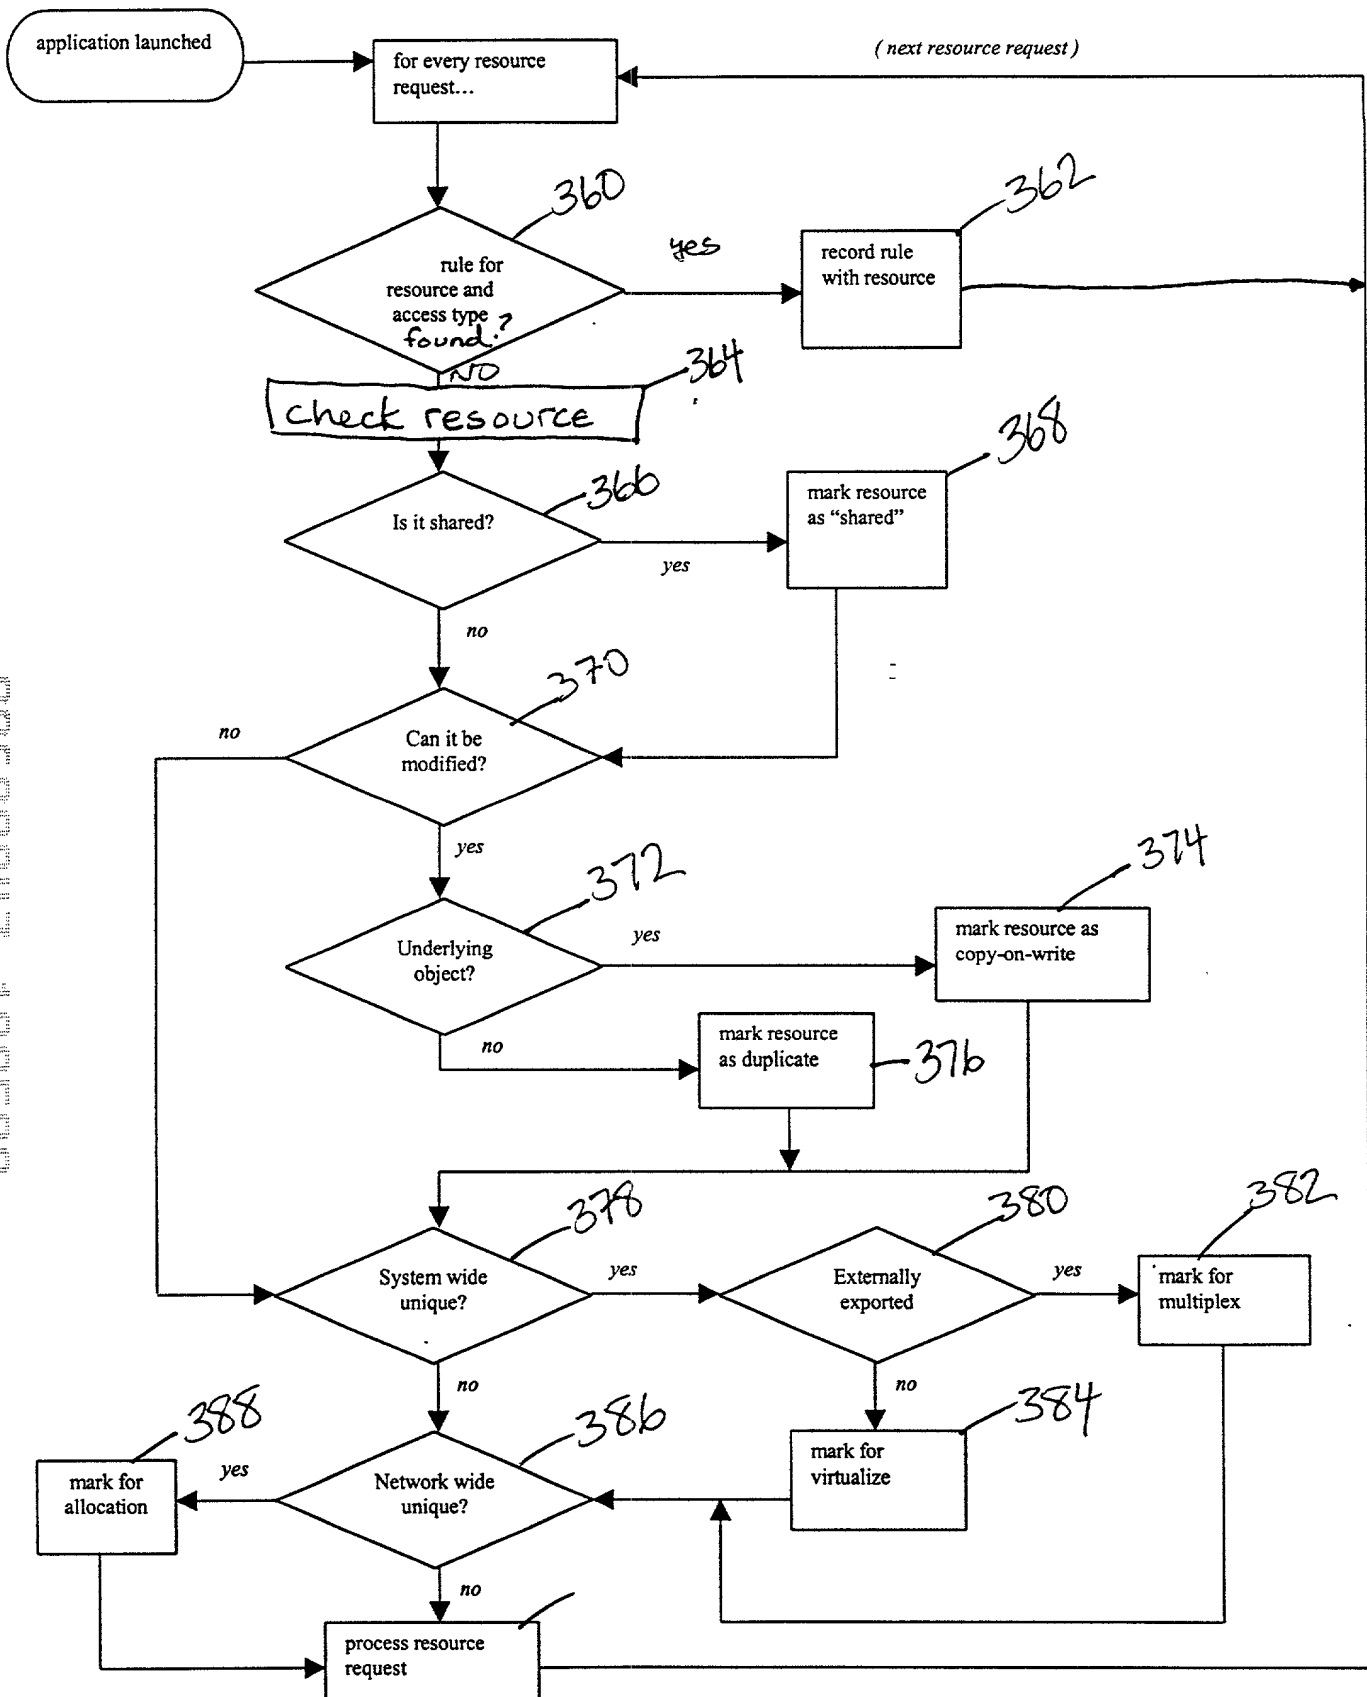


FIG. 8

005001 24808960



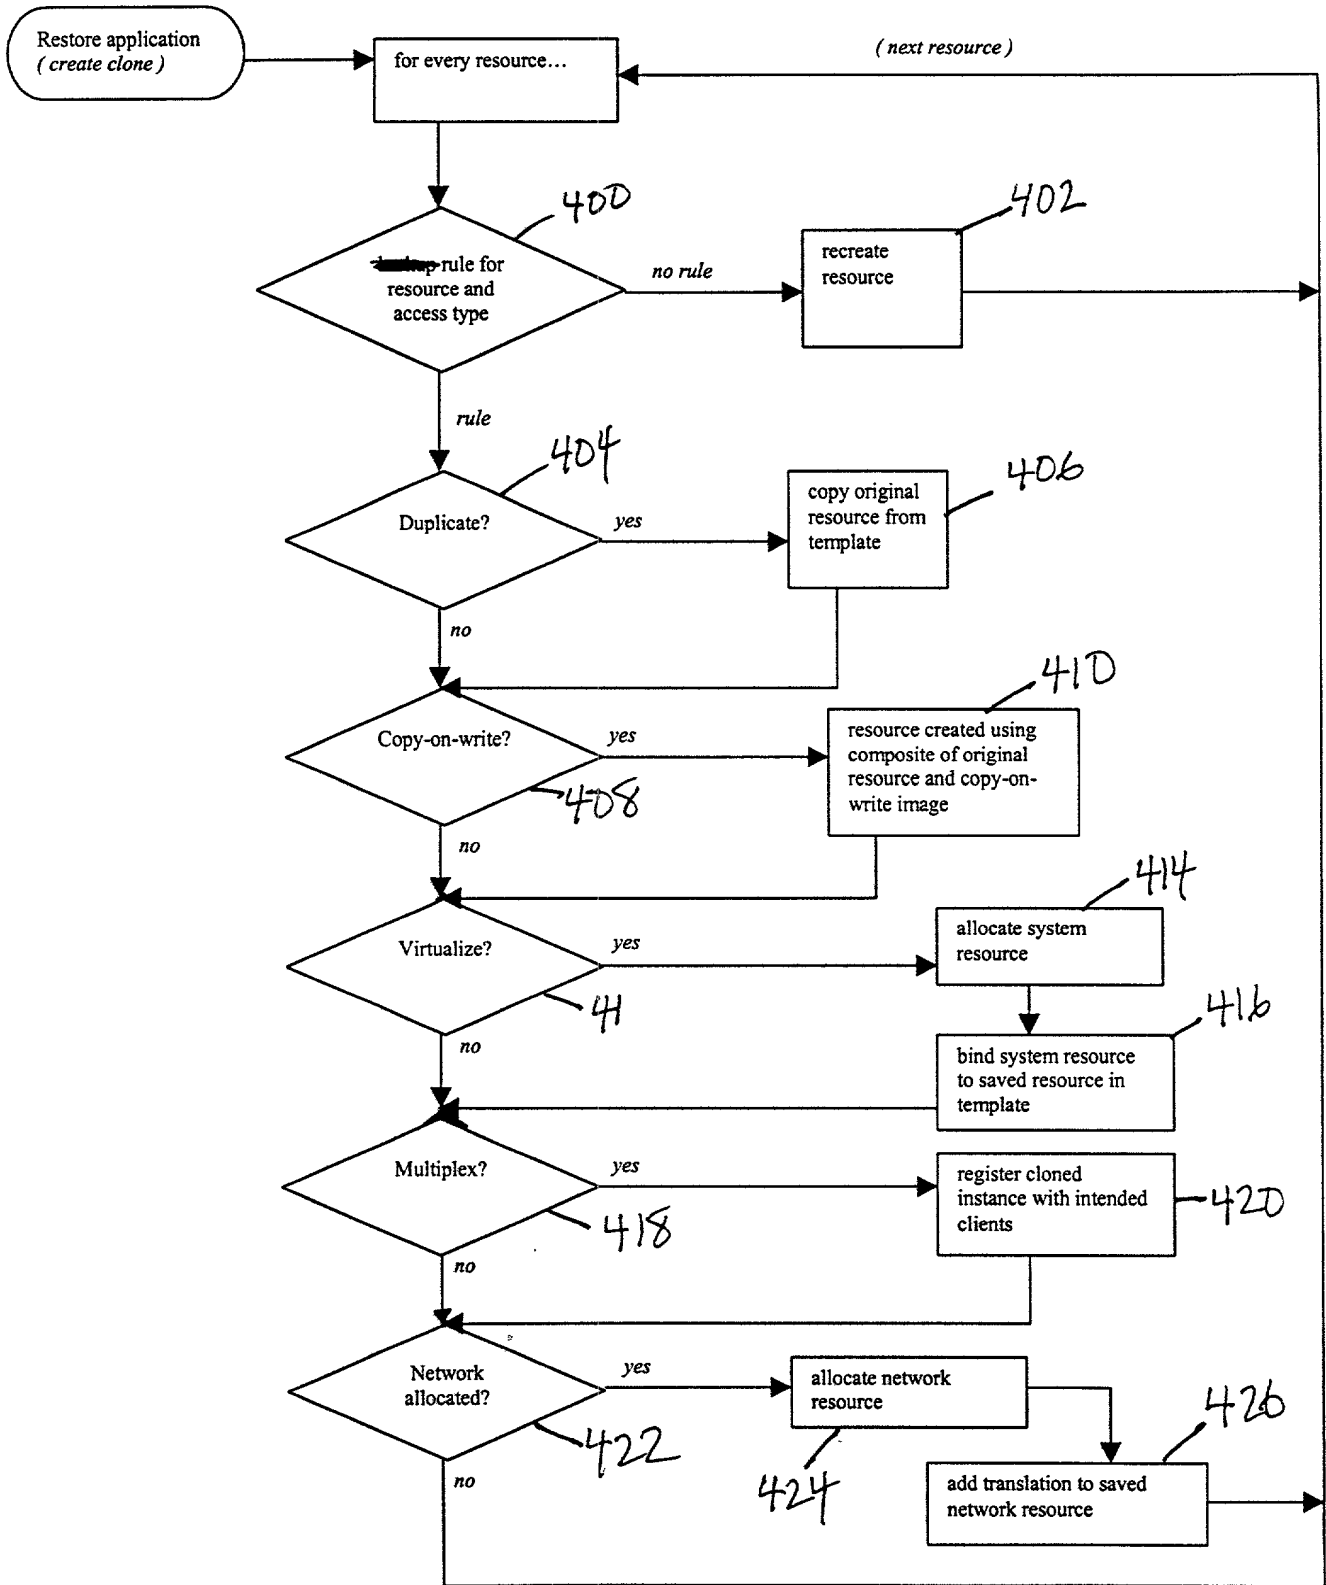


FIG. 9

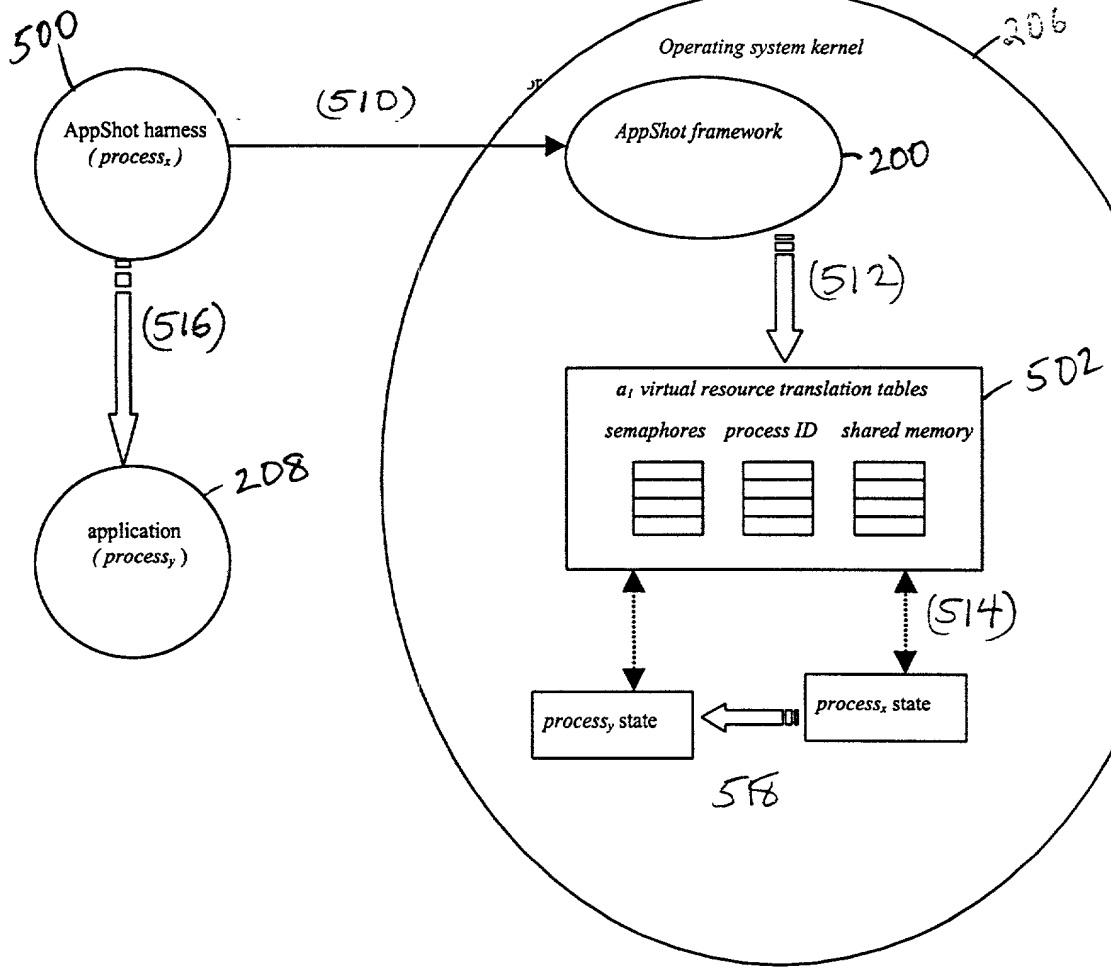


Registration of an application using virtual resource ID's.

FIG. 10

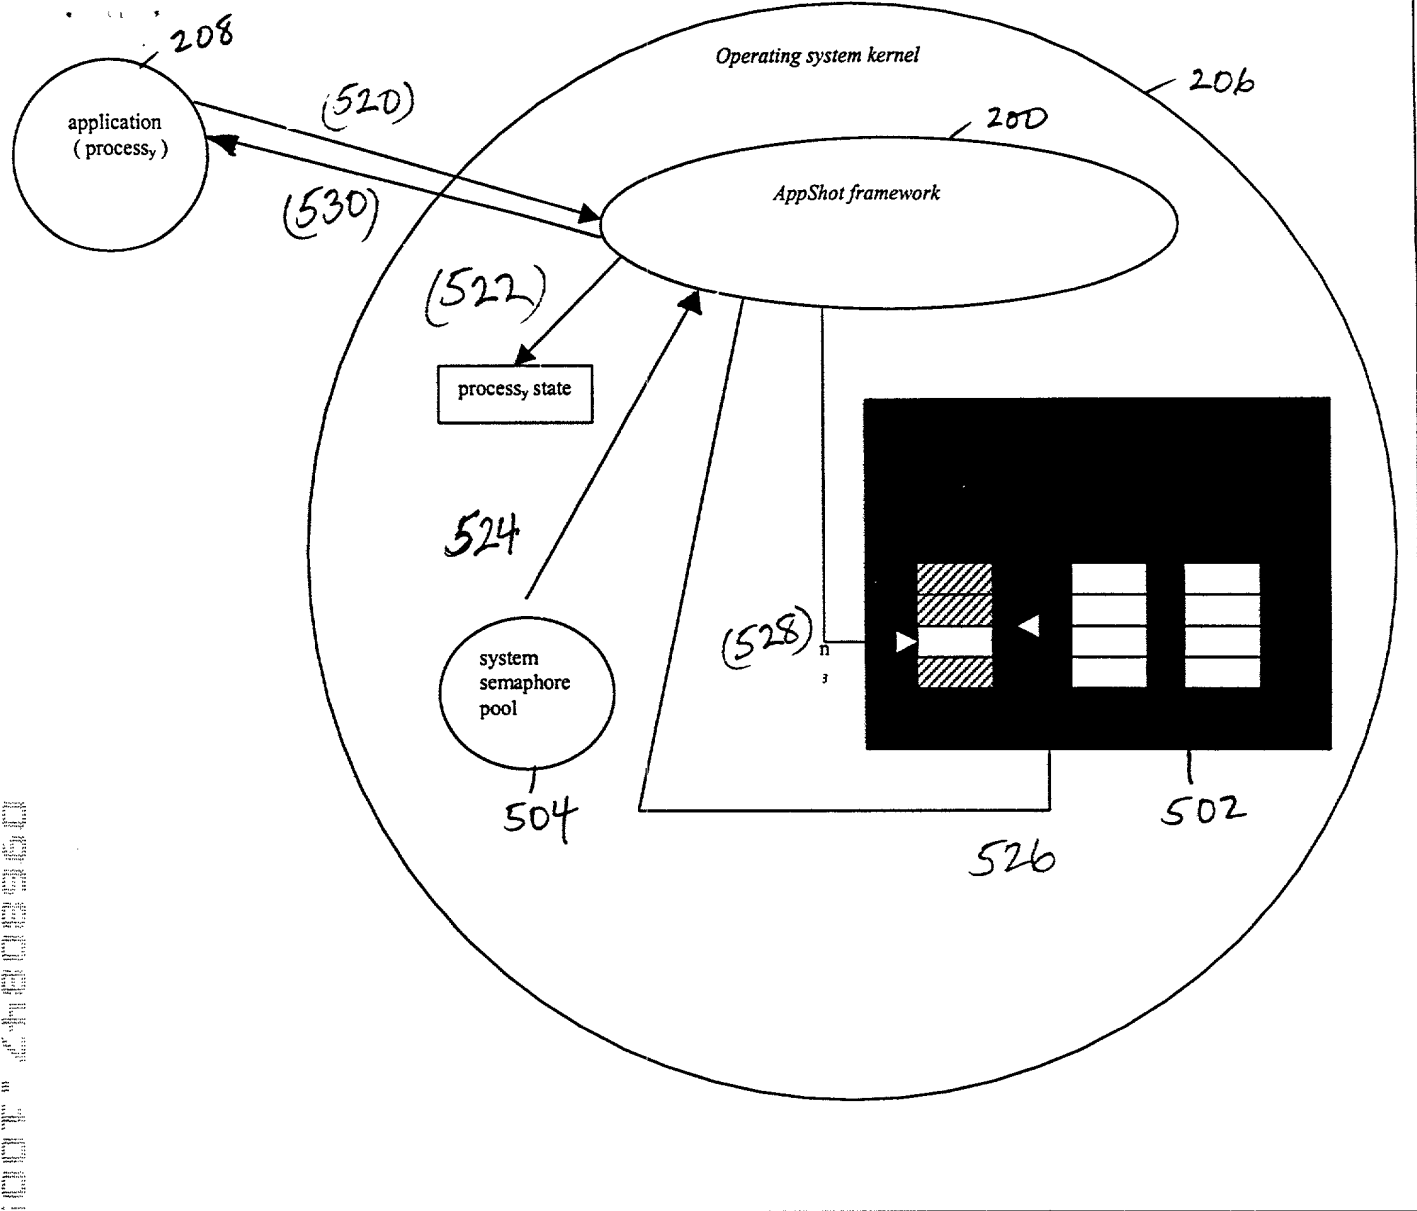


Allocation of a virtual resource (i.e. semaphore)

FIG. 11

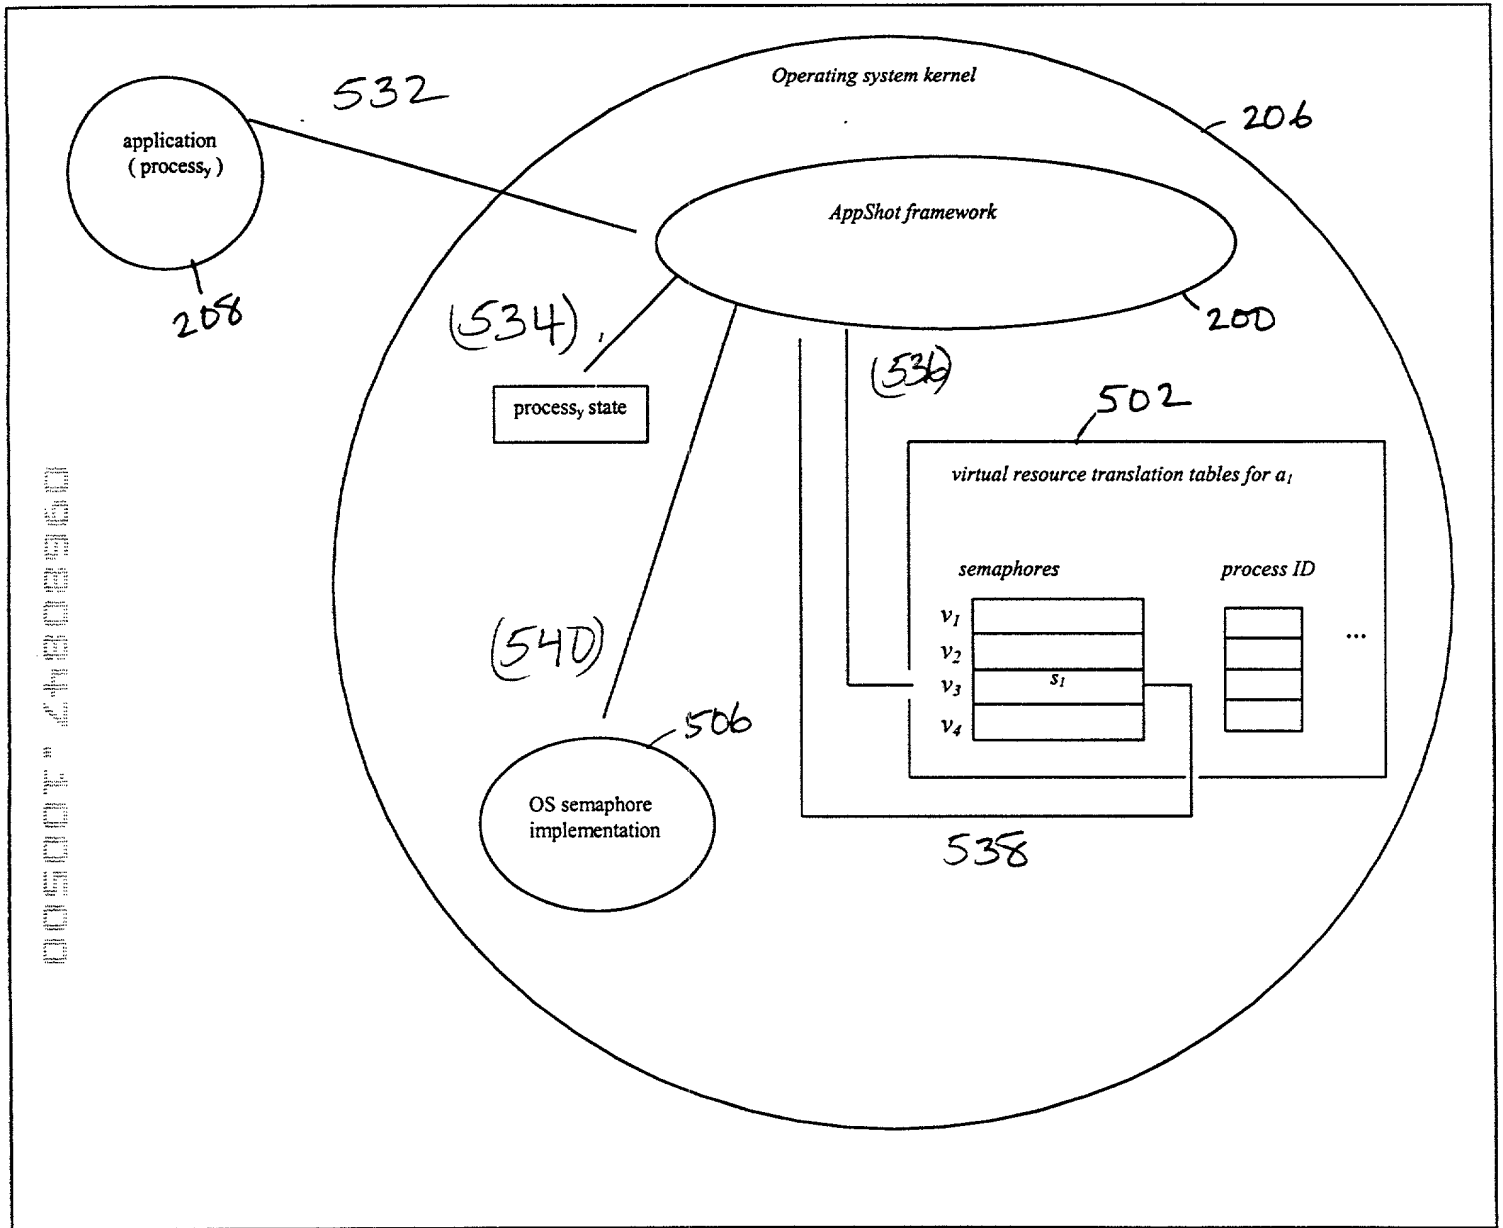

Translation of a virtual resource (i.e. semaphore), virtual to system


FIG. 12

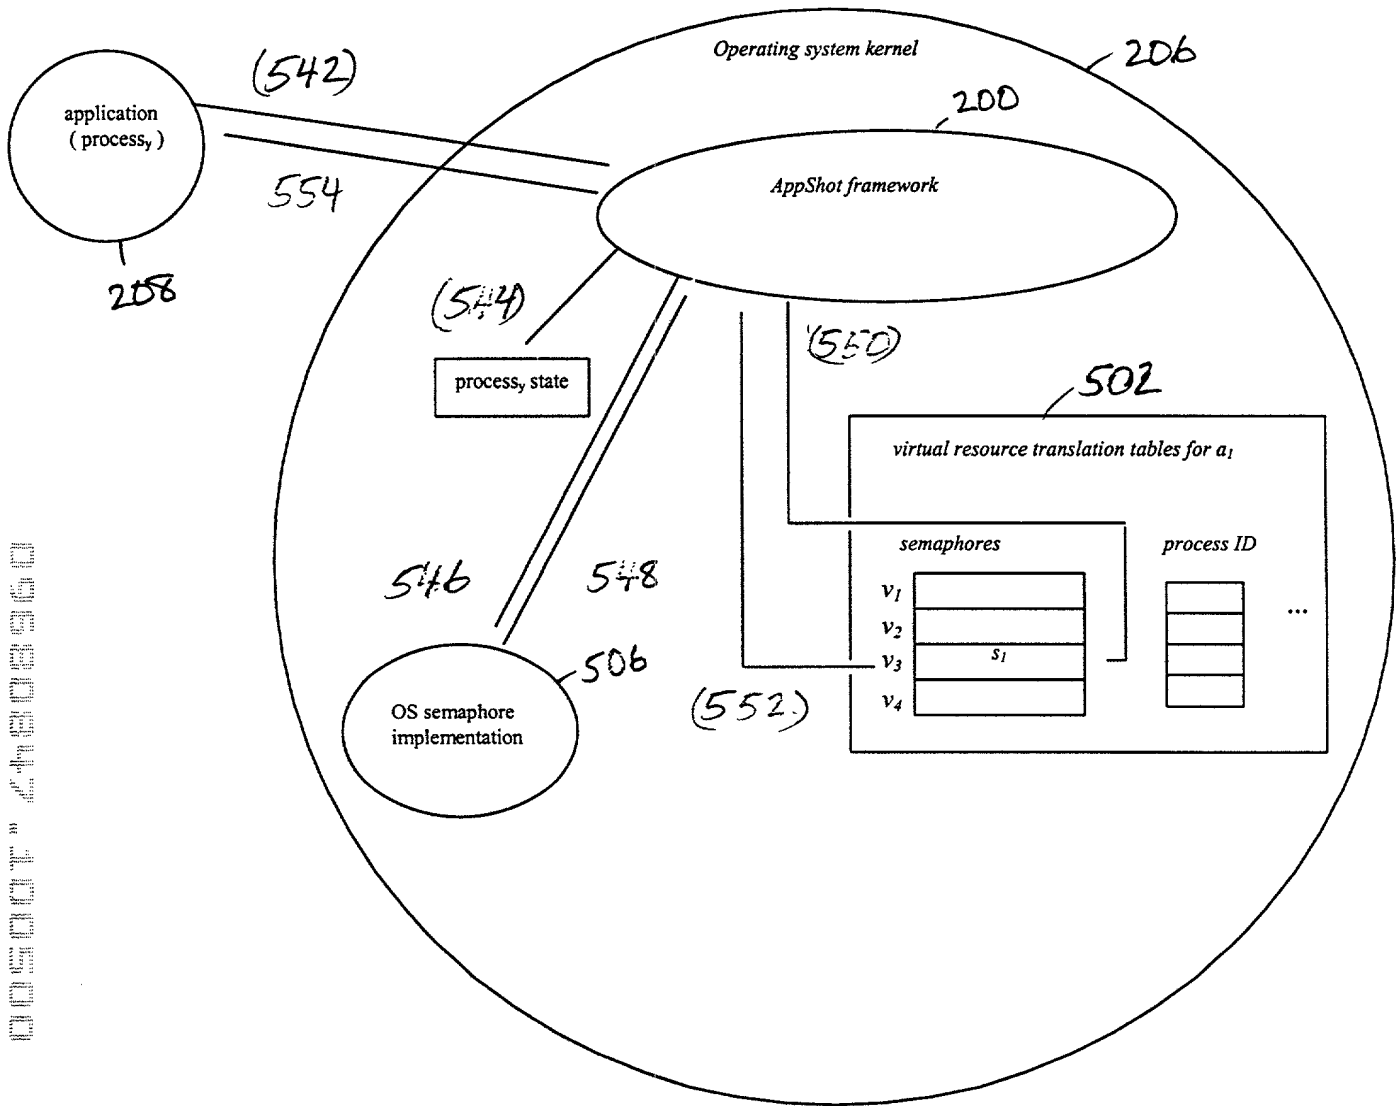

Reverse translation of a virtual resource (i.e. semaphore), system to virtual

FIG. 13


005001 2488960

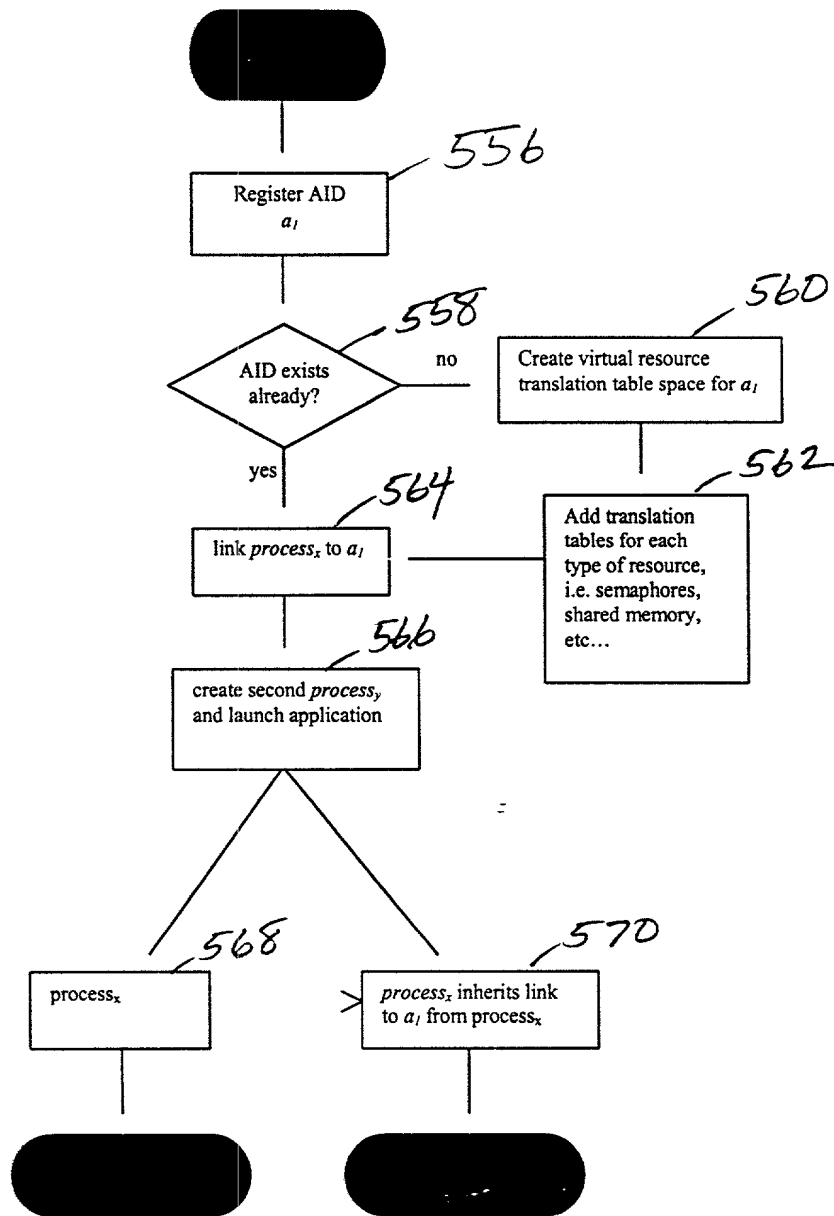

Flowchart describing creation of virtual translation tables.

Fig. 14

FIG. 15

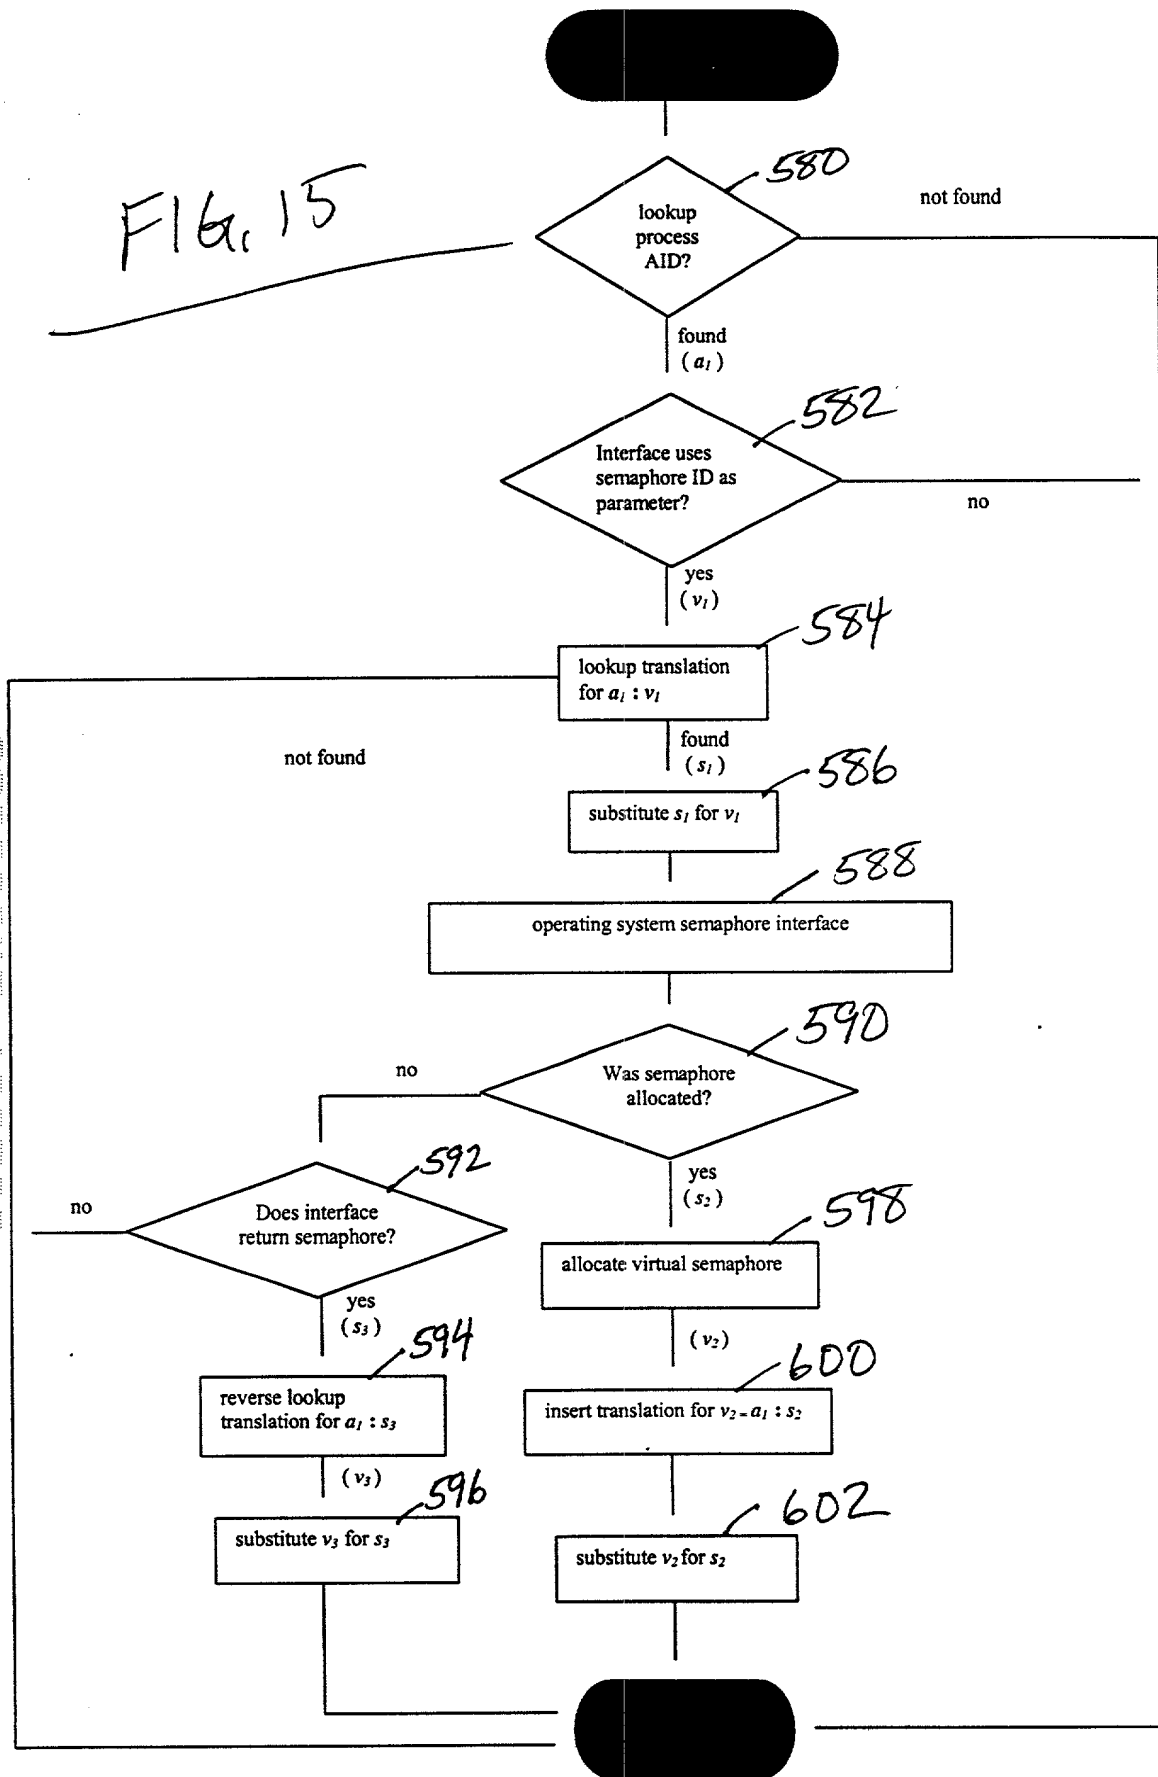

Flowchart depicting translation of a virtual resource (i.e. semaphore)

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **SNAPSHOT RESTORE OF APPLICATION CHAINS AND APPLICATIONS**, the specification of which

(check one) ☒ is attached hereto.
☐ was filed on _____ as
Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

<u>60/157,727</u> (Application Serial No.)	<u>10/5/99</u> (Filing Date)	<u>Pending</u> (Status)
<u>60/157,728</u> (Application Serial No.)	<u>10/5/99</u> (Filing Date)	<u>Pending</u> (Status)
<u>60/157,729</u> (Application Serial No.)	<u>10/5/99</u> (Filing Date)	<u>Pending</u> (Status)
<u>60/157,833</u> (Application Serial No.)	<u>10/5/99</u> (Filing Date)	<u>Pending</u> (Status)
<u>60/157,834</u> (Application Serial No.)	<u>10/5/99</u> (Filing Date)	<u>Pending</u> (Status)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status)
-----------------------------------	------------------------	-------------------

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Harold C. Hohbach, Reg. No. 17,757; Aldo J. Test, Reg. No. 18,048; Donald N. MacIntosh, Reg. No. 20,316; Edward S. Wright, Reg. No. 24,903; David J. Brezner, Reg. No. 24,774; Richard E. Backus, Reg. No. 22,701; James A. Sheridan, Reg. No. 25,433; Robert B. Chickering, Reg. No. 24,286; Richard F. Trecartin, Reg. No. 31,801; Steven F. Caserza, Reg. No. 29,780; Laura L. Kulhanjian, Reg. No. 33,257; Michael A. Kaufman, Reg. No. 32,988; Edward N. Bachand, Reg. No. 37,085; R. Michael Ananiam, Reg. No. 35,050; Robin M. Silva, Reg. No. 38,304; David C. Ashby, Reg. No. 36,432; and Maria S. Swiatek, Reg. No. 37,244; provided that if any one of said attorneys ceases being affiliated with the law firm of Flehr, Hohbach, Test, Albritton & Herbert as partner, employee or of counsel, such attorney's appointment as attorney and all powers derived therefrom shall terminate on the date such attorney ceases being so affiliated.

Direct all telephone calls to David C. Ashby at (650) 494-8700.

Address all correspondence to:

FLEHR HOHBACH TEST
ALBRITTON & HERBERT LLP
Suite 3400, Four Embarcadero Center
San Francisco, California 94111

File No. A-69622/DCA/JWC

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first

and sole inventor

Burton A. Hipp

Inventor's signature:

Burton A. Hipp

Date:

Residence:

4117 B. Haack Ct., Elk Grove, CA 95758

Citizenship:

USA

Post Office Address:

Same as above

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
Page 2

02/93

10/05/00

NO. 9617 P. 3

FLEHR HOHBACH TEST

OCT. 4. 2000 5:24PM

6505052835 -> EJASENT, INC.; Page 3

Received: 10/4/00 5:41PM

005007 2480960